

# ELECTRIC PASTA COOKER 1 BOWL 40 L

CODICE  
CR0990059

MODELLO  
D73/10CPE

SERIE  
DIAMANTE 70



## GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200. Wide range of accessories.

## TECHNICAL SPECIFICATIONS

■ Safety pressure switch to prevent activation of heating without water in the tank. ■ Water loading by means of solenoid valve. ■

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

## ELECTRIC PASTA COOKER 1 BOWL 40 L

CODICE  
CR0990059

MODELLO  
D73/10CPE

SERIE  
DIAMANTE 70

### Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990059
DEFINITION	D73/10 CPE CUOCIPASTA EL. M60 1V.42LT
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	66.8 Kg
VOLUME (net)	0,381
PACKAGE LENGTH	660 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	0,645 m3
GROSS PACKING WEIGHT	79 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	9,000 kW
IP GRADE	IPX4
CERTIFIED MODEL	D73/10 CPE

# ELECTRIC PASTA COOKER 1 BOWL 40 L


CODICE  
CR0990059

MODELLO  
D73/10CPE

SERIE  
DIAMANTE 70

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

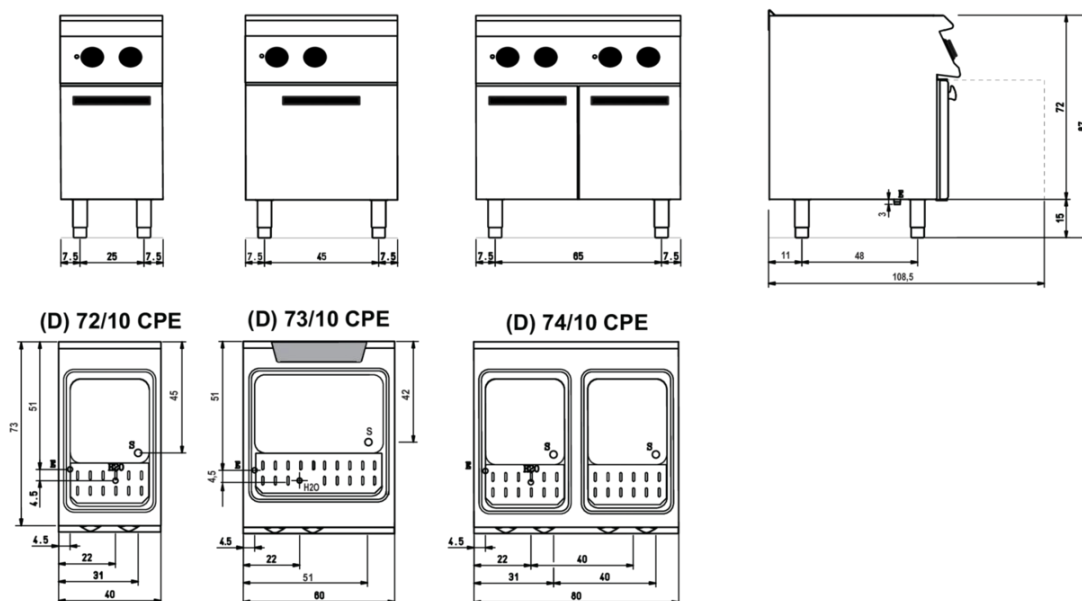

### Legenda - Legende - Key - Légende - Leyenda - Legend

**H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet

Arrivée eau - Union de agua - Wateraansluiting

**EN ISO 228-1 G 3/4**

**E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief

Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel

**S** Attacco scarico acqua - Wasserablauf - Water outlet

Vidange de l'eau - Desaguadero - Wateraftapaansluiting

**EN 10226-1 R 1**

## ELECTRIC PASTA COOKER 1 BOWL 40 L

CODICE  
CR0990059

MODELLO  
D73/10CPE

SERIE  
DIAMANTE 70



Safety pressure switch to prevent activation of heating without water in the tank.



Water loading by means of solenoid valve.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

## ELECTRIC PASTA COOKER 1 BOWL 40 L

CODICE  
CR0990059

MODELLO  
D73/10CPE

SERIE  
DIAMANTE 70

### ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1356219	CCP13F60	Basket 16x28x18 cm GN1/3 FOR D93/10 CP.
CR0789950	96KIT-A(93....)	Bath Basket Kit 96KIT-A (93....)
CR0789960	96KIT-B(93....)	Bath Basket Kit 96KIT-B (93....)
CR0592789	ZF6	Front plinth - FOR INSTALLING EQUIPMENT WITH FLOOR HEIGHT 90 CM L=60
CR0592830	ZG	SKIRTING JOINT
MA97432000	R	WHEEL KIT (2 + 2) Ø 100
MA97433000	RI	WHEEL KIT (2 + 2) Ø 101 STAINLESS STEEL
CR0592869	PZM	NO. 4 STAINLESS STEEL FEET FOR INSTALLATION ON CONCRETE PLINTH
CR0593580	9PT	No. 4 stainless steel feet for installation on tops
CR0592879	KPA	N.2 STAINLESS STEEL FEET WITH FLANGE
CR0599649	7ZL	Side plinth
CR0999229	7KIT-A	PASTA COOKER KIT
CR0999239	7KIT-B	PASTA COOKER KIT
CR0999249	7KIT-C	PASTA COOKER KIT