

ELECTRIC FRYER 1 BOWL 10 L

CODICE
CR1207329

MODELLO
DPFRE10

SERIE
DROP-IN 7



GENERAL CHARACTERISTICS

A complete and versatile built-in range. Compatible with all types of furniture including exposed solutions, the Olis DROP-IN range makes the most of space. It also allows for a large number of customised built-in solutions.

TECHNICAL SPECIFICATIONS

ELECTRIC FRYER 1 BOWL 10 L

CODICE
CR1207329

MODELLO
DPFRE10

SERIE
DROP-IN 7

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1207329
DEFINITION	DPFRE10 FRIGGITR.EL.10LT DROP-IN
COMMERCIAL LINE	SERIE DROP IN
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	625 mm
DIM. HEIGHT	340 mm
NET WEIGHT	21 Kg
VOLUME (net)	0,085
PACKAGE LENGTH	830 mm
PACKAGE WIDTH	440 mm
PACKAGING HEIGHT	740 mm
PACKAGE VOLUME	0,270 m3
GROSS PACKING WEIGHT	30.2 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	9,000 kW
IP GRADE	IPX4
CERTIFIED MODEL	DPFRE10

ELECTRIC FRYER 1 BOWL 10 L



weinnovate cooking


CODICE
CR1207329

MODELLO
DPFRE10

SERIE
DROP-IN 7

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

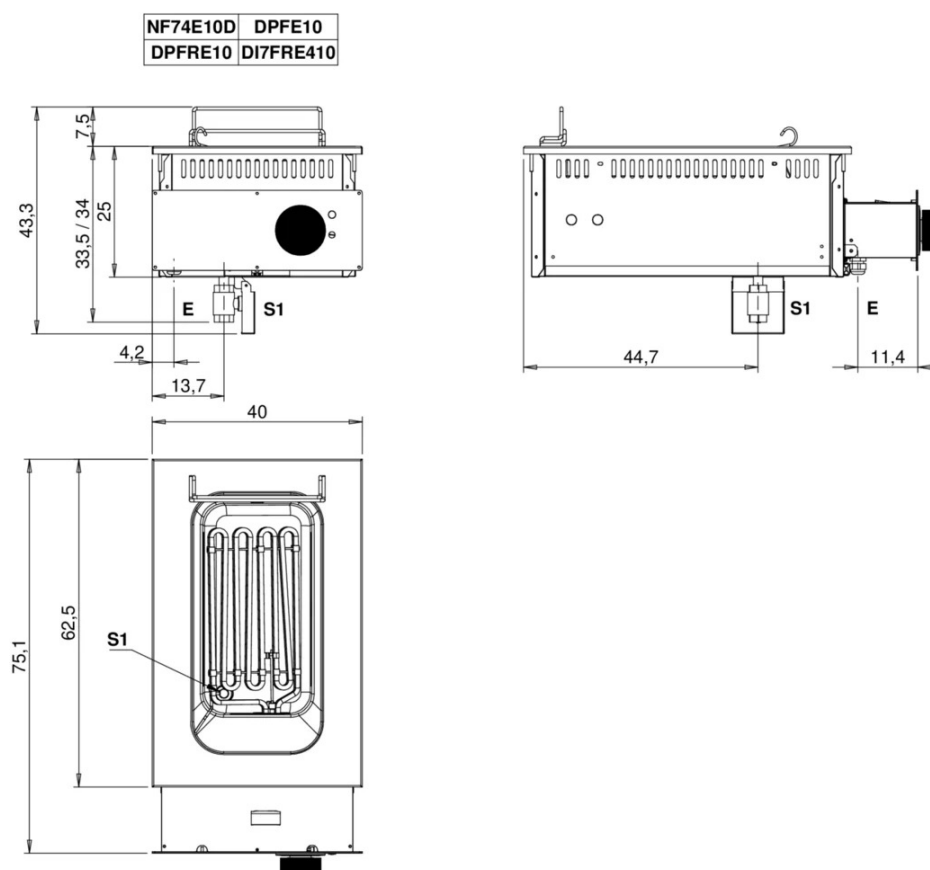

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba EN ISO 228-1 R3/4	A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nível - Niveaakraan - Torneira de nível
S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	

ELECTRIC FRYER 1 BOWL 10 L

CODICE
CR1207329

MODELLO
DPFRE10

SERIE
DROP-IN 7



An elegant and contemporary solution. Thanks to the special frame kit, which can be ordered as an accessory, the edge of the equipment remains flush with the worktop, creating a whole between equipment and worktop



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

ELECTRIC FRYER 1 BOWL 10 L

CODICE
CR1207329

MODELLO
DPFRE10

SERIE
DROP-IN 7

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1201900	CR1201900	FRAME KIT FOR FLUSH INSTALLATION - M40
CR1201930	CR1201930	FRAME KIT FOR FREE-STANDING INSTALLATION - M40
CR0599830	CR0599830	KIT 2 1/2 BASKETS FOR DROP-IN FRYER - Lt. 10/15