

## ELECTRIC FRYER 1 BOWL 15 L

CODICE  
CR1207339

MODELLO  
DPFRE15

SERIE  
DROP-IN 7



### GENERAL CHARACTERISTICS

A complete and versatile built-in range. Compatible with all types of furniture including exposed solutions, the Olis DROP-IN range makes the most of space. It also allows for a large number of customised built-in solutions.

### TECHNICAL SPECIFICATIONS

# ELECTRIC FRYER 1 BOWL 15 L

CODICE  
CR1207339

MODELLO  
DPFRE15

SERIE  
DROP-IN 7

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR1207339
DEFINITION	DPFRE15 FRIGGITR.EL.15LT DROP-IN
COMMERCIAL LINE	SERIE DROP IN
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	625 mm
DIM. HEIGHT	340 mm
NET WEIGHT	0 Kg
VOLUME (net)	0,085
PACKAGE LENGTH	830 mm
PACKAGE WIDTH	430 mm
PACKAGING HEIGHT	720 mm
PACKAGE VOLUME	0,257 m3
GROSS PACKING WEIGHT	45 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	12,000 kW
IP GRADE	IPX4
CERTIFIED MODEL	DPFRE15

# ELECTRIC FRYER 1 BOWL 15 L


CODICE  
CR1207339

MODELLO  
DPFRE15

SERIE  
DROP-IN 7

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm  
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

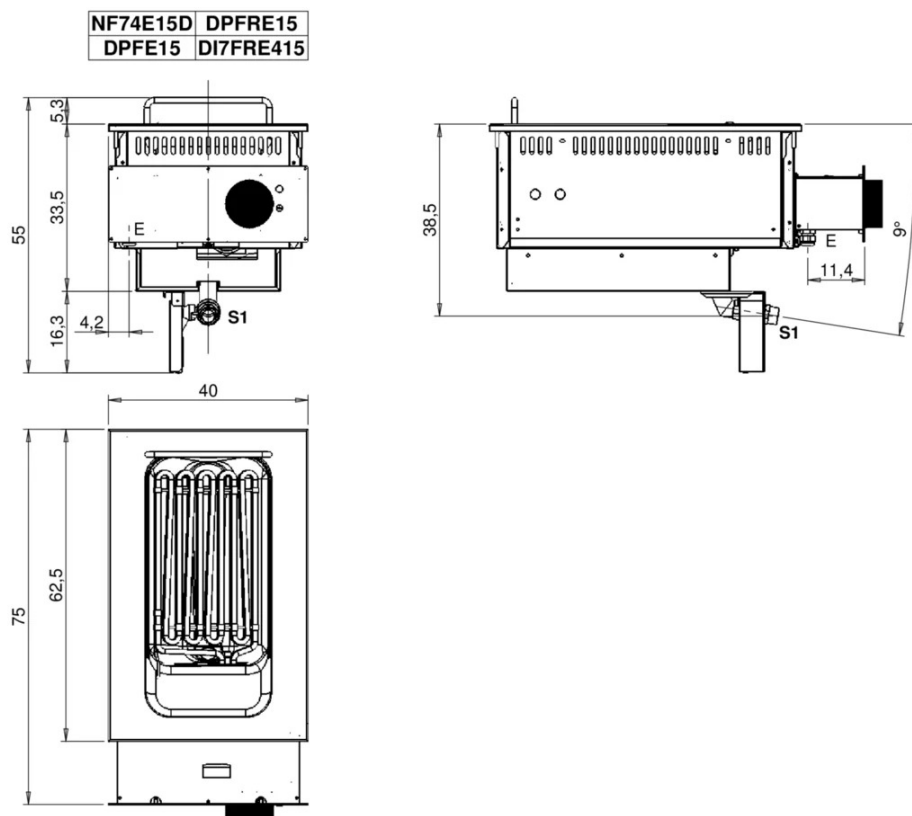

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda			
<b>E</b>	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	<b>G</b>	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
<b>S</b>	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	<b>H20</b>	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
<b>S1</b>	Scarico vasca - Wannenabflusrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	<b>A1 =</b>	Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno
<b>EN ISO 228-1 R1</b>		<b>A2 =</b>	Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
<b>S2</b>	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukkelep - Válvula de depressão		
<b>S3</b>	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto		
<b>S4</b>	Scarico - Abflusrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	<b>L</b>	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível

## ELECTRIC FRYER 1 BOWL 15 L

CODICE  
CR1207339

MODELLO  
DPFRE15

SERIE  
DROP-IN 7



An elegant and contemporary solution. Thanks to the special frame kit, which can be ordered as an accessory, the edge of the equipment remains flush with the worktop, creating a whole between equipment and worktop



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

## ELECTRIC FRYER 1 BOWL 15 L

CODICE  
CR1207339

MODELLO  
DPFRE15

SERIE  
DROP-IN 7

### ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1201900	CR1201900	FRAME KIT FOR FLUSH INSTALLATION - M40
CR1201930	CR1201930	FRAME KIT FOR FREE-STANDING INSTALLATION - M40
CR0599830	CR0599830	KIT 2 1/2 BASKETS FOR DROP-IN FRYER - Lt. 10/15