

2-burner GAS cooker

CODICE
CR1355519

MODELLO
ONC64GB

SERIE
SERIE 650



GENERAL CHARACTERISTICS

The OLIS SNACK 650 range has a design that characterises all equipment in both top and monoblock versions, with large knobs and an ergonomic dashboard shape.

The wide choice of machines and high performance make this range the ideal choice for environments that are not very spacious but still require high-performance machines.

The modularity of the range allows infinite combinations with installation on compartment bases or tables.

TECHNICAL SPECIFICATIONS

■ Professional gas hobs have power ratings that are specific to large models. ■ The hob is moulded in one piece, made of AISI 304 18/10 stainless steel with a Scotch Brite finish, with large radii and a large capacity for collecting overflowing liquids. ■ Enamelled cast-iron grills to ensure a long service life. ■ The gas hobs are designed with pilot flame, thermocouple and valve tap to ensure maximum safety.

■ Ovens in GN 1/1 size with adjustable temperature from 140-280°C. ■ Ergonomic grips mounted on a sloping dashboard for easy visibility. ■ 3.85kW and 5.7kW burners ■ Cast-iron grids on the top with long spokes allow even small pots to be placed on them. ■ Burners with power ratings of 3.85kW and 5.7kW, valve taps and stabilised flame thermocouple for maximum safety. ■ Cast-iron burner with removable crown for easy cleaning and separate pilot flame for optimal operation.

2-burner GAS cooker

CODICE
CR1355519

MODELLO
ONC64GB

SERIE
SERIE 650

Technical Information

| SPECIFICATION | DATA |
|--------------------------|-------------------------|
| MATERIAL | CR1355519 |
| DEFINITION | ONC64GB 2 FUOCHI 60 M40 |
| COMMERCIAL LINE | SERIE 600 |
| SUPPLY | GAS |
| DIM. WIDTH | 400 mm |
| DIM. PRODUCTIVITY | 650 mm |
| DIM. HEIGHT | 295 mm |
| NET WEIGHT | 19 Kg |
| VOLUME (net) | 0,077 |
| PACKAGE LENGTH | 440 mm |
| PACKAGE WIDTH | 780 mm |
| PACKAGING HEIGHT | 680 mm |
| PACKAGE VOLUME | 0,231 m3 |
| GROSS PACKING WEIGHT | 25.6 Kg |
| GAS POWER | 9,55 |
| GAS POWER (G25.3/25mbar) | 9,20 |
| N. FIRES/PLATES | DUE FUOCHI |
| CERTIFIED MODEL | ONC64G |

2-burner GAS cooker



weinnovate cooking


CODICE
CR1355519

MODELLO
ONC64GB

SERIE
SERIE 650

Schema di installazione - Installation diagram - Installationsplan Schéma d'installation - Esquema de instalacion - Installatieschema

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

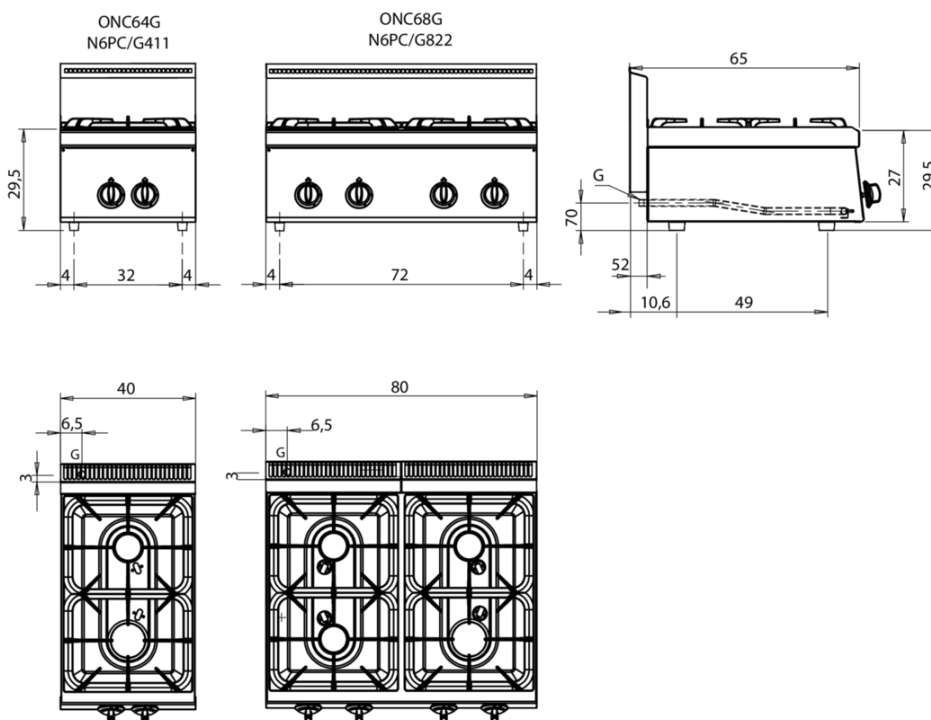

| Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda | |
|--|---|
| E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico | G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK) |
| S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água | H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água |
| S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba | A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio |
| S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão | L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nível - Niveaakraan - Torneira de nível |
| S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto | |
| S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno | |

2-burner GAS cooker

CODICE
CR1355519

MODELLO
ONC64GB

SERIE
SERIE 650



Cast-iron Griddles with long spokes not only allow safe support of large pans, but also provide ideal support for smaller pans.



The separate pilot flame ensures optimal burner operation, providing efficient and uniform combustion.



Burners with power ratings of 3.85kW and 5.7kW, valve taps and stabilised flame thermocouple for maximum safety.



AISI304 stainless steel stamped top with Scotch Brite finish made in one piece to facilitate cleaning steps and prevent water and dirt infiltration.



Our cast iron burner with removable crown is specially designed to simplify the cleaning process. With the removable crown, you can easily access all parts of the burner, ensuring complete and thorough cleaning.

2-burner GAS cooker

CODICE
CR1355519

MODELLO
ONC64GB

SERIE
SERIE 650

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|---------------|---------|---|
| CR0852849 | OBV64 | OPEN BASE size 40cm Series 650 |
| MA10405042900 | OR40 | Shelf 40cm |
| CR0858009 | OCS40 | 2 drawers with plastic tray GN1/1 H15cm |
| CR0858029 | OP40D/S | door for 40 -80 compartment |