

HIGH TECH WASH PLUS - OPHTW3STRPLUS

CODICE
BND211092

MODELLO
OPHTW3STRPLUS

SERIE
WASHING



GENERAL CHARACTERISTICS

Professional dishwashers designed to meet the needs for efficient and rapid cleaning of dishes and utensils in commercial settings, such as restaurants, hotels, and similar food facilities. Olis equipment is designed to handle a high volume of tableware and ensure high hygiene standards in commercial settings.

TECHNICAL SPECIFICATIONS

■ The new technology of potwashers allows you to easily and intuitively follow all the stages of your potwashing process directly from the control panel. The innovative rinsing circuit, the energy saving function (a device that optimises energy functions avoiding unnecessary waste) the high level of performance and the high quality materials make these machines extremely competitive and versatile.

■ Optional heat recovery unit (TR) ■ Electronics with energy-saving function ■ Double wall ■ Standard rinse pump ■ Totally moulded step basin ■ Independent stainless steel wash/rinse arms ■ Split sump filter with removable sump + pump filter ■ Thermostop to ensure rinsing temperature in accordance with HACCP requirements ■ Automatic machine cleaning cycle

HIGH TECH WASH PLUS - OPHTW3STRPLUS

CODICE
BND211092

MODELLO
OPHTW3STRPLUS


SERIE
WASHING

Technical Information

SPECIFICATION	DATA
MATERIAL	BND211092
DEFINITION	OPHTW3STRPLUS LAVAOGGETTI EL. 85X72,5
DIM. WIDTH	990 mm
DIM. PRODUCTIVITY	885 mm
DIM. HEIGHT	2140 mm
NET WEIGHT	264 Kg
VOLUME (net)	1,875
PACKAGE LENGTH	1050 mm
PACKAGE WIDTH	950 mm
PACKAGING HEIGHT	2290 mm
PACKAGE VOLUME	2,284 m3
GROSS PACKING WEIGHT	290 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50Hz
ELECTRICAL POWER	13.4 kW
CERTIFICATE NR	4/7/10/13 min
WASH PUMP	2180W
CERTIFICATE NR	13360W
WATER CONSUMPTION	4,3 lt

CODICE
BND211092

 MODELLO
OPHTW3STRPLUS

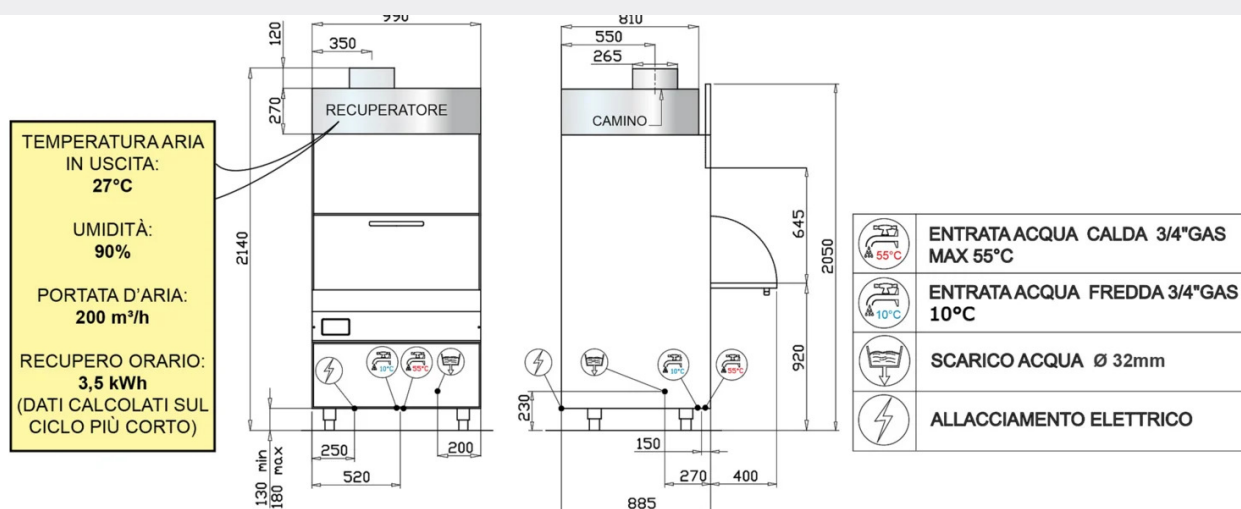 SERIE
WASHING


DATI TECNICI					
DIMENSIONI ESTERNE					
larghezza		990 mm			
profondita'		885 mm			
altezza(piedino avvitato)		2140 mm			
PESO NETTO (versione base)		237 kg			
TENSIONE DI ALIMENTAZIONE		400V 3N 50Hz			
POTENZA MASSIMA ASSORBITA		13360 W			
DUREZZA ACQUA		< 8 °F			
CONDUTTIVITA' ACQUA		> 200 8µS/cm			
PRESSIONE ACQUA ALIMENTAZIONE		200-400 kPa			
ALTEZZA UTILE & CESTI					
altezza utile		645 mm			
DIMENSIONE CESTI		850X725 mm			
DOTAZIONE CESTI		1XC86/A - 1XC97/A - 1X92100			
N° CICLI	(minuti)	1 (4)	2 (7)	3 (10)	4 (13)
ALIMENTAZIONE ACQUA 10°C					
produzione cesti(*) ⁽¹⁾	Cesti/h	15	8	6	4
CONSUMO ACQUA PER CICLO		4,3 L			
CAPACITA' BOILER		20 L			
RESISTENZA BOILER		9000 W			
SET. TEMPERATURA RISCACQUO		85°C			
CAPACITA' VASCA		78 L			
RESISTENZA VASCA		6000 W			
SET. TEMPERATURA VASCA		55°C			
POTENZA POMPA LAVAGGIO		2180 W (810 l/min ^{***}) x 2			
POTENZA POMPA RISCACQUO		250 W (150 l/min ^{***})			
pompa scarico (opzionale)		190 W (120 l/min ^{***})			
LIVELLO DI PRESSIONE ACUSTICA		71,1 dB(A)			

(*) CON TERMOSTOP DI SERIE

(***) PORTATA MASSIMA

(¹) In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETÀ DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI


PAGINA 1 / 1

HIGH TECH WASH PLUS - OPHTW3STRPLUS

CODICE
BND211092

MODELLO
OPHTW3STRPLUS

SERIE
WASHING



RT system to recover the steam produced by the running machine to preheat the cold feed water. Immediate savings on energy consumption and improved temperature in the working environment, which is no longer saturated by moisture produced by the machine.



Stabilized pressure rinsing and constant boiler water temperature of 85°C. Thanks to the atmospheric boiler, mixing of mains water in the rinse phase is avoided. The PLUS system also ensures greater control and correct dosing of rinse aid in each cycle.



Fully molded basin. Independent stainless steel wash/rinse arms



Double-walled door