

ELECTRIC SOLID TOP ON OPEN BASE

CODICE
CR0990459

MODELLO
D94/10CTE

SERIE
DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Cast iron centre plate and ring. ■ Piezoelectric ignition with liquid-protected push button. ■ Adjustable temperature on the plate from 50° to 450°C.

■ 4 independent cooking zones. ■ Cantilevered plate with perimeter grease trough with drain hole. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety. ■ Thermostat for surface temperature regulation from 50 to 400°C, and with safety function for overtemperature protection. ■ Radiant plate size 710x710 mm thickness 18 mm made of steel with electrolytic hard chrome coating.

ELECTRIC SOLID TOP ON OPEN BASE

CODICE
CR0990459

MODELLO
D94/10CTE

SERIE
DIAMANTE 90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990459
DEFINITION	D94/10 CTE TUTTAPIASTRA EL.V. GIORNO
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	140 Kg
VOLUME (net)	0,626
PACKAGE LENGTH	860 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	1,010 m3
GROSS PACKING WEIGHT	150.2 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	16,000 kW
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 CTE

CODICE
CR0990459

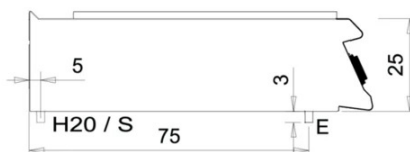
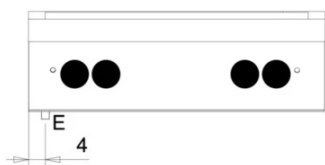
 MODELLO
D94/10CTE

 SERIE
DIAMANTE 90

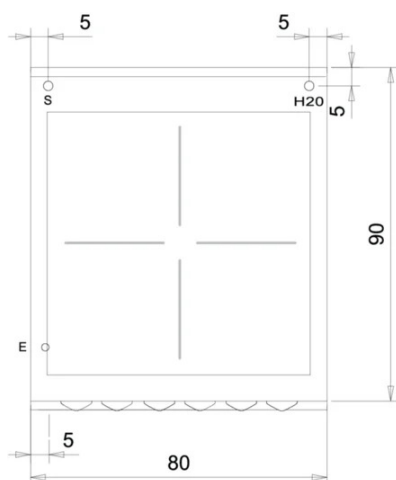
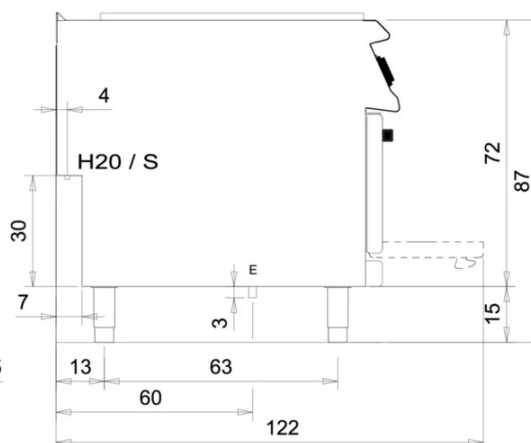
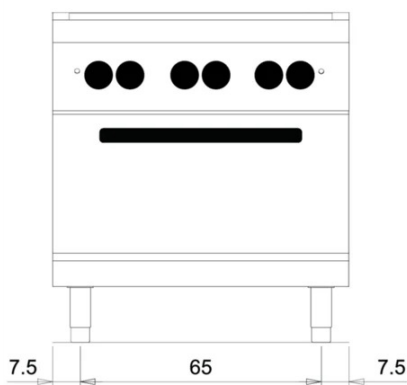
 SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -
 ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

 MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

(D) 94/10 TCTE



(D) 94/10 CTE


 Legenda - Legende - Key
 Légende - Leyenda - Legenda

E Pressacavo entrata linea elettrica
 Stopfbuchse - Pisacable
 Electric cable stress relief
 Presse étoupe de câble él.
 Elektrische kabelwartel

H20* Attacco arrivo acqua
 Wasseranschluss - Water inlet
 Arrivée eau - Union de agua
 Wateraansluiting
 EN ISO 228-1 G 1/2

S Attacco scarico acqua - Wasserablauf
 Water outlet - Vidange de l'eau
 Desaguadero - Wateraftapaansluiting
 Ø = 30 mm

ELECTRIC SOLID TOP ON OPEN BASE

CODICE
CR0990459

MODELLO
D94/10CTE

SERIE
DIAMANTE 90



4 independent cooking zones.



Cantilevered plate with perimeter
grease trough with drain hole.



Equipment certified for low voltage
directive 2014/35/EU according to the
international CB scheme.



Thanks to the jet-proofing certification
(IPX5) obtained through specific tests,
knobs and under-knobs can be washed,
without compromising functionality
and safety.

ELECTRIC SOLID TOP ON OPEN BASE

CODICE
CR0990459

MODELLO
D94/10CTE

SERIE
DIAMANTE 90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0996979	DBVP4	Diamond door 39.5x3.6x46.5 cm for 40 cm compartments
CR0997009	DBVPA4	Accessory Diamond door 39.5x3.6x46.5 cm for 40 cm compartments
CR0997029	DAPC	Accessories for accessory diamond knife holder
CR0997019	DAPD	Accessories for Diamond door accessories
CR0997039	DAPS	Accessories for diamond spice rack
CR0997049	DAPM	Accessories for accessory Diamond door
CR0997059	DAPDB	Accessories for accessory Diamond door/bottle holders
CR1353589	DBVC4	Drawer kit 39.5x56x46.5 cm for compartments of 40