

80lt GAS MANUAL BRATT PAN WITH STAINLESS STEEL BOTTOM

CODICE
CR0990699

MODELLO
D94/10KBGI

SERIE
DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Multifunctional tilting braising pan, equipment for professional catering, suitable for cooking sauces, braises and cooking with oil. ■ It guarantees high performance, exceptional firing uniformity. ■ Water feed directly into the tank via standard solenoid valve, controlled by a button on the front of the equipment ■ Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.

■ Stainless steel cooking vessel, 10 mm thick. ■ Cooking temperature controlled by thermostat with adjustment from 100 to 280°C. ■

Heating by chrome-plated steel burner. ■ Safety valve with thermocouple, electric ignition. ■ Robust, double-walled, self-balancing lids made of stainless steel to reduce heat loss. ■ Large-radius tilting tank. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

80lt GAS MANUAL BRATT PAN WITH STAINLESS STEEL BOTTOM

CODICE
CR0990699

MODELLO
D94/10KBGI

SERIE
DIAMANTE 90

Technical Information

| SPECIFICATION | DATA |
|---------------------------------|-----------------------------------|
| MATERIAL | CR0990699 |
| DEFINITION | D94/10 KBGI BRASIERA GAS M80 INOX |
| COMMERCIAL LINE | DIAMANTE |
| SUPPLY | MIXED |
| DIM. WIDTH | 800 mm |
| DIM. PRODUCTIVITY | 900 mm |
| DIM. HEIGHT | 870 mm |
| NET WEIGHT | 147 Kg |
| VOLUME (net) | 0,626 |
| PACKAGE LENGTH | 840 mm |
| PACKAGE WIDTH | 1020 mm |
| PACKAGING HEIGHT | 1170 mm |
| PACKAGE VOLUME | 1,003 m3 |
| GROSS PACKING WEIGHT | 162 Kg |
| STANDARD POWER SUPPLY | 220-240V 1N |
| FREQUENCY | 50 Hz |
| ELECTRICAL POWER | 0,015 kW |
| GAS POWER | 20,00 |
| GAS POWER (G25.3/25mbar) | 19,00 |
| IP GRADE | IPX5 |
| CERTIFIED MODEL | D94/10 KBGI |

80lt GAS MANUAL BRATT PAN WITH STAINLESS STEEL BOTTOM


CODICE
CR0990699

MODELLO
D94/10KBGI

SERIE
DIAMANTE 90


SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

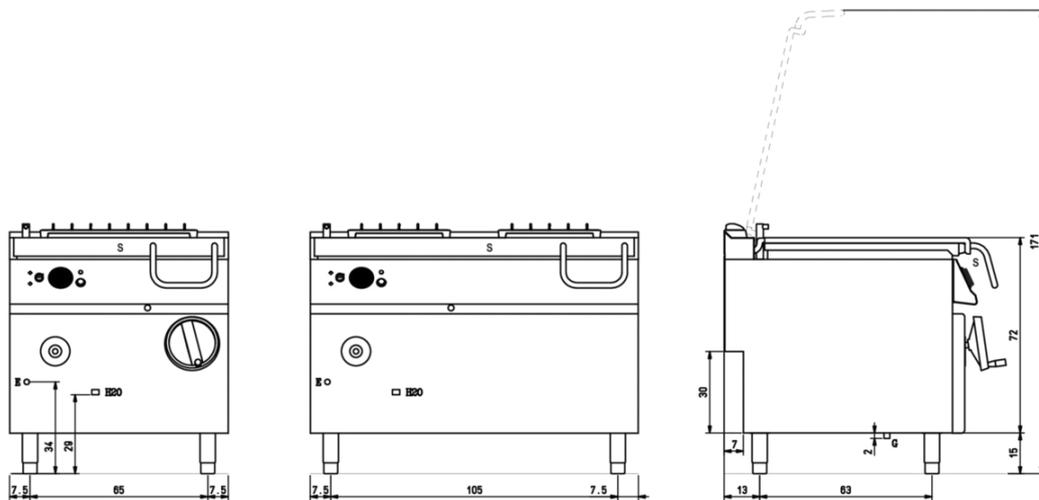

(D) 94/10 KBG ...

(D) 96/10 KBG ...

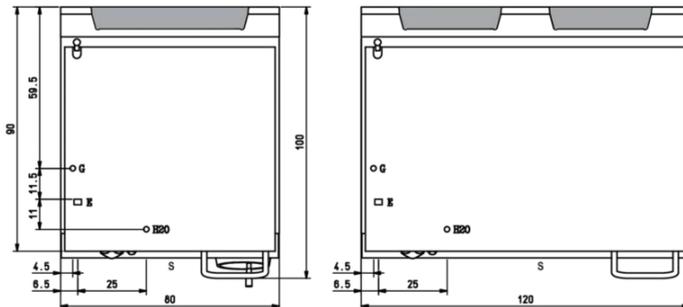

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet
Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 3/4
- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection
Arrivée gaz - Union de gas - Gasaansluiting
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- S** Scarico vasca - Wannenabflussrohr - Pan outlet
Vidange du bac - Descarga cuba - Water toevoer

80lt GAS MANUAL BRATT PAN WITH STAINLESS STEEL BOTTOM

CODICE
CR0990699

MODELLO
D94/10KBGI

SERIE
DIAMANTE 90



Self-balancing lids.



Large-radius tilting tank.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

80lt GAS MANUAL BRATT PAN WITH STAINLESS STEEL BOTTOM

CODICE
CR0990699

MODELLO
D94/10KBGI

SERIE
DIAMANTE 90

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|------------|---------|--|
| CR0592799 | ZF8 | Front plinth - FOR INSTALLING EQUIPMENT WITH FLOOR HEIGHT 90 CM L=80 |
| CR0592830 | ZG | SKIRTING JOINT |
| CR0592820 | 9ZL | Side plinth |
| MA97432000 | R | WHEEL KIT (2 + 2) Ø 100 |
| MA97433000 | RI | WHEEL KIT (2 + 2) Ø 101 STAINLESS STEEL |
| CR0592869 | PZM | NO. 4 STAINLESS STEEL FEET FOR INSTALLATION ON CONCRETE PLINTH |
| CR0593580 | 9PT | No. 4 stainless steel feet for installation on tops |
| CR0592879 | KPA | N.2 STAINLESS STEEL FEET WITH FLANGE |
| CR0592940 | 9CAT* | Water column for top equipment |