

## ELECTRIC FRY TOP SMOOTH CHROME PLATE

CODICE  
CR1207389

MODELLO  
DPFTEC60

SERIE  
DROP-IN 7



### GENERAL CHARACTERISTICS

A complete and versatile built-in range. Compatible with all types of furniture including exposed solutions, the Olis DROP-IN range makes the most of space. It also allows for a large number of customised built-in solutions.

### TECHNICAL SPECIFICATIONS

## ELECTRIC FRY TOP SMOOTH CHROME PLATE

CODICE  
CR1207389

MODELLO  
DPFTEC60

SERIE  
DROP-IN 7

### Technical Information

SPECIFICATION	DATA
MATERIAL	CR1207389
DEFINITION	DPFTEC60 FRY-TOP ELLC M60 DROP-IN
COMMERCIAL LINE	SERIE DROP IN
SUPPLY	ELECTRICS
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	625 mm
DIM. HEIGHT	250 mm
NET WEIGHT	0 Kg
VOLUME (net)	0,094
PACKAGE LENGTH	640 mm
PACKAGE WIDTH	810 mm
PACKAGING HEIGHT	540 mm
PACKAGE VOLUME	0,280 m3
GROSS PACKING WEIGHT	61 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	7,500 kW
IP GRADE	IPX4
CERTIFIED MODEL	DPFTEC60

# ELECTRIC FRY TOP SMOOTH CHROME PLATE

CODICE  
CR1207389


MODELLO  
DPFTEC60

SERIE  
DROP-IN 7

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm  
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

<b>NFT74ED</b>	<b>NFT76ED</b>	<b>NFT78ED</b>
<b>DPBE40..</b>	<b>DPBE60..</b>	<b>DPBE80..</b>
<b>DPFTEC..40</b>	<b>DPFTEC..60</b>	<b>DPFTEC..80</b>
<b>DI7FTE4..</b>	<b>DI7FTE6..</b>	<b>DI7FTE8..</b>

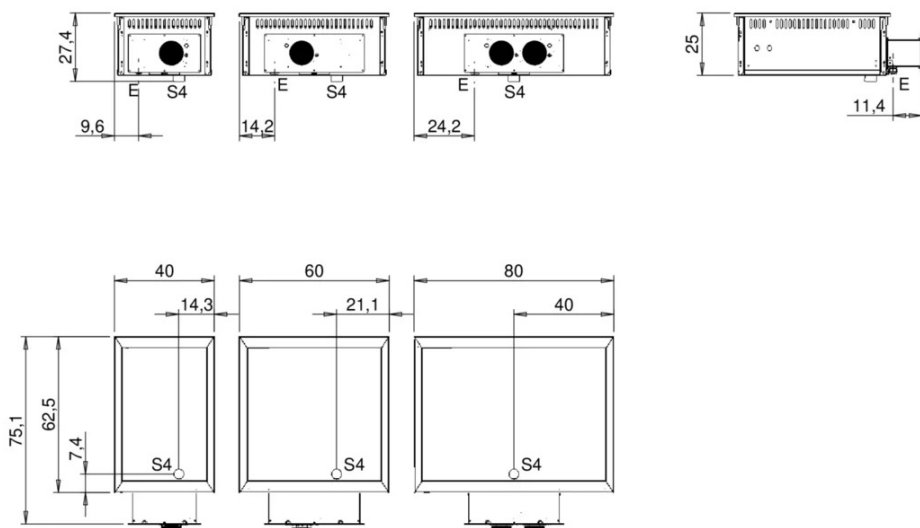

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
<b>E</b> Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	<b>G</b> Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
<b>S</b> Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	<b>H20</b> Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
<b>S1</b> Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	<b>A1</b> = Calda - Heiss - Warm - Chaud - Caliente - Warm - Morno <b>A2</b> = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
<b>S2</b> Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	
<b>S3</b> Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de água interstícios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	
<b>S4</b> Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno <b>Ø=4.5 cm</b>	<b>L</b> Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível

## ELECTRIC FRY TOP SMOOTH CHROME PLATE

CODICE  
CR1207389

MODELLO  
DPFTEC60

SERIE  
DROP-IN 7



An elegant and contemporary solution. Thanks to the special frame kit, which can be ordered as an accessory, the edge of the equipment remains flush with the worktop, creating a whole between equipment and worktop



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

## ELECTRIC FRY TOP SMOOTH CHROME PLATE

**CODICE**  
CR1207389

**MODELLO**  
DPFTEC60

**SERIE**  
DROP-IN 7

### ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1201910	CR1201910	FRAME KIT FOR FLUSH FLOOR INSTALLATION - M60
CR0985219	70XFTP4	SPLASH GUARD FOR FRY TOP MODULE 400
CR0985229	70XFTP6	SPLASH GUARD FOR FRY TOP MODULE 600
CR0985239	70XFTP8	SPLASH GUARD FOR FRY TOP MODULE 800
CR0592060	NXFTT	PLANCHA CLEANING PLUG