

2-burner GAS cooker

CODICE
CR1355579

MODELLO
ONC64G

SERIE
SERIE 650



GENERAL CHARACTERISTICS

The OLIS SNACK 650 range has a design that characterises all equipment in both top and monoblock versions, with large knobs and an ergonomic dashboard shape.

The wide choice of machines and high performance make this range the ideal choice for environments that are not very spacious but still require high-performance machines.

The modularity of the range allows infinite combinations with installation on compartment bases or tables.

TECHNICAL SPECIFICATIONS

■ Professional gas hobs have power ratings that are specific to large models. ■ The hob is moulded in one piece, made of AISI 304 18/10 stainless steel with a Scotch Brite finish, with large radii and a large capacity for collecting overflowing liquids. ■ Enamelled cast-iron grills to ensure a long service life. ■ The gas hobs are designed with pilot flame, thermocouple and valve tap to ensure maximum safety.

■ Ovens in GN 1/1 size with adjustable temperature from 140-280°C. ■ Ergonomic grips mounted on a sloping dashboard for easy visibility. ■ 2 x 7kW burners ■ Cast-iron grids on the top with long spokes allow even small pots to be placed on them. ■ Burners with 7kW power, valve taps and stabilised flame thermocouple for maximum safety. ■ Cast-iron burner with removable crown for easy cleaning and separate pilot flame for optimal operation.

2-burner GAS cooker

CODICE
CR1355579

MODELLO
ONC64G

SERIE
SERIE 650

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1355579
DEFINITION	ONC64G 2 FUOCHI POTENZIATA 60 M40
COMMERCIAL LINE	SERIE 600
SUPPLY	GAS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	650 mm
DIM. HEIGHT	295 mm
NET WEIGHT	14.4 Kg
VOLUME (net)	0,077
PACKAGE LENGTH	440 mm
PACKAGE WIDTH	780 mm
PACKAGING HEIGHT	680 mm
PACKAGE VOLUME	0,233 m3
GROSS PACKING WEIGHT	20 Kg
GAS POWER	15,40
GAS POWER (G25.3/25mbar)	13,20
N. FIRES/PLATES	DUE FUOCHI
CERTIFIED MODEL	ONC64G

2-burner GAS cooker



weinnovate cooking


CODICE
CR1355579

MODELLO
ONC64G

SERIE
SERIE 650

Schema di installazione - Installation diagram - Installationsplan Schéma d'installation - Esquema de instalacion - Installatieschema

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

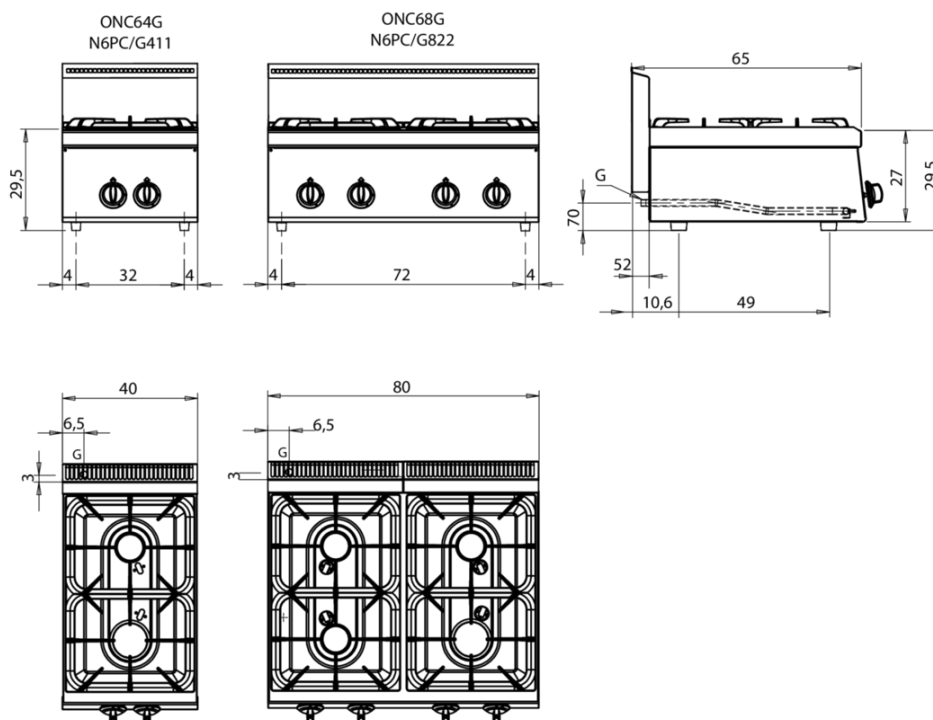

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	
S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível

2-burner GAS cooker

CODICE
CR1355579

MODELLO
ONC64G

SERIE
SERIE 650



Cast-iron Griddles with long spokes not only allow safe support of large pans, but also provide ideal support for smaller pans.



The separate pilot flame ensures optimal burner operation, providing efficient and uniform combustion.



Burners with power ratings of 3.85kW and 5.7kW, valve taps and stabilised flame thermocouple for maximum safety.



AISI304 stainless steel stamped top with Scotch Brite finish made in one piece to facilitate cleaning steps and prevent water and dirt infiltration.



Our cast iron burner with removable crown is specially designed to simplify the cleaning process. With the removable crown, you can easily access all parts of the burner, ensuring complete and thorough cleaning.

2-burner GAS cooker

CODICE
CR1355579

MODELLO
ONC64G

SERIE
SERIE 650

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0852849	OBV64	OPEN BASE size 40cm Series 650
MA10405042900	OR40	Shelf 40cm
CR0858009	OCS40	2 drawers with plastic tray GN1/1 H15cm
CR0858029	OP40D/S	door for 40 -80 compartment