

EASY WASH PLUS - OPEW37D

CODICE
BND211002

MODELLO
OPEW37D

SERIE
WASHING



GENERAL CHARACTERISTICS

Professional dishwashers designed to meet the needs for efficient and rapid cleaning of dishes and utensils in commercial settings, such as restaurants, hotels, and similar food facilities. Olis equipment is designed to handle a high volume of tableware and ensure high hygiene standards in commercial settings.

TECHNICAL SPECIFICATIONS

■ Glass and dishwashers, ideal for bars, pubs, restaurants and hotels. These front-loading undercounter dishwashers, with an attractive design thanks to the redesigned electromechanical control panel, offer a large load capacity and guarantee maximum performance at an affordable price. ■ The many options available such as softener, detergent dispenser and drain pump allow the machine to be customised to the user's needs.

■ Solid AISI 304 stainless steel construction ■ Double-walled door ■ Door safety device in the event of accidental opening ■ Moulded and sloping basin for perfect emptying ■ Integrated overflow system and drain filters for triple protection of the wash pump ■ Anti-drip roof to safeguard the hygiene of freshly washed dishes ■ Lightweight composite impellers, efficient even at low mains pressure ■ Removable nozzles for easy daily cleaning ■ Non-return valve

EASY WASH PLUS - OPEW37D


CODICE
BND211002

MODELLO
OPEW37D

SERIE
WASHING

Technical Information

SPECIFICATION	DATA
MATERIAL	BND211002
DEFINITION	OPEW37D LAVAST. MEC. 370
DIM. WIDTH	420 mm
DIM. PRODUCTIVITY	490 mm
DIM. HEIGHT	650 mm
NET WEIGHT	32.5 Kg
VOLUME (net)	0,134
PACKAGE LENGTH	580 mm
PACKAGE WIDTH	500 mm
PACKAGING HEIGHT	810 mm
PACKAGE VOLUME	0,235 m3
GROSS PACKING WEIGHT	37 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50Hz
ELECTRICAL POWER	2.8 kW
CERTIFICATE NR	120 sec
WASH PUMP	190W - LS 400W
CERTIFICATE NR	2590W - LS 2800W
WATER CONSUMPTION	1,8 lt

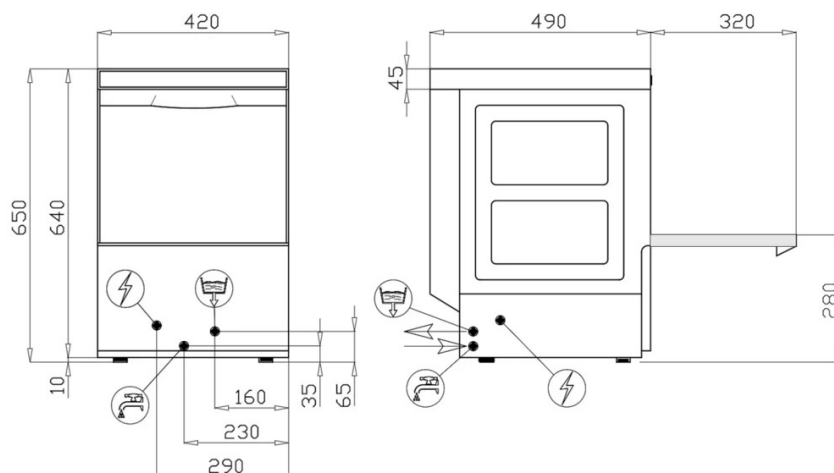CODICE
BND211002MODELLO
OPEW37DSERIE
WASHING

	WASSERZUGANG 3/4" GAS
	WASSERABLAUF Ø 24mm
	STROMANSCHLUSS

DATI TECNICI		
DIMENSIONI ESTERNE		
larghezza		420mm
profondita'		490mm
altezza(piedino avvitato)		650mm
PESO (versione base)		30 kg
TENSIONE DI ALIMENTAZIONE		230V 50Hz
POTENZA MASSIMA ASSORBITA	2590 W	2800 W
DUREZZA ACQUA		2-8 °F
PRESSIONE ACQUA ALIMENTAZIONE		200-400 kPa
ALTEZZA UTILE & CESTI		
diametro piatti	---	280mm
altezza bicchieri		275mm
DIMENSIONE CESTI		370X370mm
DOTAZIONE CESTI		2XC10 - 1X10728 - 1X15060
N° CICLI (sec)		1(120)
ALIMENTAZIONE ACQUA 55°C		
produzione cesti(*) ⁽¹⁾ Cesti/h		30
ALIMENTAZIONE ACQUA 10°C		
produzione cesti(*) ⁽¹⁾ Cesti/h		14
CONSUMO ACQUA PER CICLO (pressione idrica 200kPa)		1.8 L
CAPACITA' BOILER		3 L
RESISTENZA BOILER		2400 W
SET. TEMPERATURA RISCACQUO		85°C
CAPACITA' VASCA		12.5 L
RESISTENZA VASCA		1250 W
SET. TEMPERATURA VASCA		55°C
POTENZA POMPA	190 W(120 L/min ^{***})	400 W(185 L/min ^{***})
pompa scarico (optional)	25 W h MAX scarico 0.8m (40 L/min ^{***})	
RUMOROSITA' (dB(A)±0.7)	60.6	61.2

(*) CON TERMOSTOP DI SERIE

(***) PORTATA MASSIMA

⁽¹⁾ In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETÀ DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO

PAGINA 1 / 1

EASY WASH PLUS - OPEW37D

CODICE
BND211002

MODELLO
OPEW37D


SERIE
WASHING



Double-walled door



Moulded and sloping basin for perfect emptying

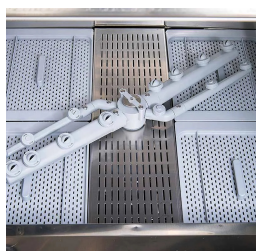

Lightweight composite impellers,
efficient even at low mains pressure

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
EWDDE	EWDDE	DETERGENT DISPENSER