

# EASY WASH PLUS T - OPEW40TLS

CODICE  
BND211014

MODELLO  
OPEW40TLS

SERIE  
WASHING



## GENERAL CHARACTERISTICS

Professional dishwashers designed to meet the needs for efficient and rapid cleaning of dishes and utensils in commercial settings, such as restaurants, hotels, and similar food facilities. Olis equipment is designed to handle a high volume of tableware and ensure high hygiene standards in commercial settings.

## TECHNICAL SPECIFICATIONS

■ Glass and dishwashers, ideal for bars, pubs, restaurants and hotels. These front-loading undercounter machines, with an attractive design thanks to the renewed electromechanical control panel, offer a large loading capacity, guaranteeing maximum performance at an affordable price. The many optional extras available such as softener, detergent dispenser and drain pump allow the machine to be customised to the user's needs. ■ The many options available such as softener, detergent dispenser and drain pump allow the machine to be customised to the user's needs. ■ New electronic versions available in the T models with LED control panel that offers the display of washing and rinsing temperatures, the selected programme, working status and main alarm codes. They also offer 4 standard washing programmes that

adapt the machine's performance individually to the type of dishes to be washed.

- Solid AISI 304 stainless steel construction
- Double-walled door
- Door safety device in the event of accidental opening
- Moulded and sloping basin for perfect emptying
- Integrated overflow system and drain filters for triple protection of the wash pump
- Anti-drip roof to safeguard the hygiene of freshly washed dishes
- Lightweight composite impellers, efficient even at low mains pressure
- Removable nozzles for easy daily cleaning
- Non-return valve
- Electronic version with 4 preset wash cycles

CODICE  
 BND211014

 MODELLO  
 OPEW40TLS

 SERIE  
 WASHING



## Technical Information

SPECIFICATION	DATA
<b>MATERIAL</b>	<b>BND211014</b>
DEFINITION	OPEW40TLS LAVAST. ELET. 400
<b>DIM. WIDTH</b>	<b>450 mm</b>
DIM. PRODUCTIVITY	535 mm
<b>DIM. HEIGHT</b>	<b>700 mm</b>
NET WEIGHT	38.5 Kg
<b>VOLUME (net)</b>	<b>0,169</b>
PACKAGE LENGTH	530 mm
<b>PACKAGE WIDTH</b>	<b>620 mm</b>
PACKAGING HEIGHT	820 mm
<b>PACKAGE VOLUME</b>	<b>0,269 m3</b>
GROSS PACKING WEIGHT	43 Kg
<b>STANDARD POWER SUPPLY</b>	<b>220-240V 1N</b>
FREQUENCY	50Hz
<b>ELECTRICAL POWER</b>	<b>3.2 kW</b>
CERTIFICATE NR	60/90/120/180 sec
<b>WASH PUMP</b>	<b>400W</b>
CERTIFICATE NR	3200W
<b>WATER CONSUMPTION</b>	<b>1,8 lt</b>

CODICE  
BND211014

MODELLO  
OPEW40TLS

SERIE  
WASHING

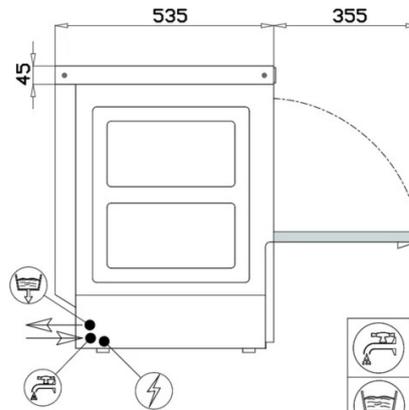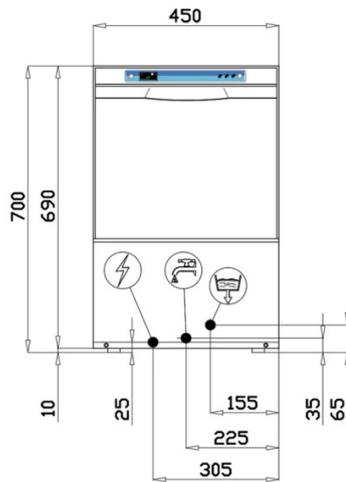

	ENTRATA ACQUA 3/4" GAS
	SCARICO ACQUA Ø 24mm
	ALLACCIAMENTO ELETTRICO

DATI TECNICI	STANDARD			
<b>DIMENSIONI ESTERNE</b>				
larghezza	450 mm			
profondita'	535 mm			
altezza (piedino avvitato)	700 mm			
PESO (versione base)	37 kg			
TENSIONE DI ALIMENTAZIONE	230V 50Hz			
POTENZA MASSIMA ASSORBITA	3200 W			
DUREZZA ACQUA	2-8 °F			
PRESSIONE ACQUA ALIMENTAZIONE	200-400 kPa			
<b>ALTEZZA UTILE &amp; CESTI</b>				
diametro piatti	295 mm			
altezza bicchieri	305 mm			
DIMENSIONE CESTI	400X400 mm			
DOTAZIONE CESTI	2XC121 - 1X10728 - 1X15060			
N° CICLI (sec)	1(60)	2(90)	3(120)	4(180)
<b>ALIMENTAZIONE ACQUA 55°C</b>				
produzione cesti(*) <sup>(1)</sup> Cesti/h	<b>60</b>	<b>40</b>	<b>30</b>	<b>20</b>
<b>ALIMENTAZIONE ACQUA 10°C</b>				
produzione cesti(*) <sup>(1)</sup> Cesti/h	<b>16</b>	<b>16</b>	<b>16</b>	<b>16</b>
CONSUMO ACQUA PER CICLO (pressione idrica 200kPa)	1.8 L			
CAPACITA' BOILER	3.4 L			
RESISTENZA BOILER	2800 W			
SET. TEMPERATURA RISCACQUO	85°C			
CAPACITA' VASCA	14.5 L			
RESISTENZA VASCA	1250 W			
SET. TEMPERATURA VASCA	55°C			
POTENZA POMPA	400 W (185 L/min)			
pompa scarico (optional)	25 W h MAX vidange 0.8m (40 L/min <sup>***</sup> )			
RUMOROSITA'	60.6[CF] 61.2[LS] (dB(A)±0.7)			

(\*) CON TERMOSTOP DI SERIE

(\*\*\*) PORTATA MASSIMA

<sup>(1)</sup> In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO

PAGINA 1 / 1

## EASY WASH PLUS T - OPEW40TLS

CODICE  
BND211014

MODELLO  
OPEW40TLS

SERIE  
WASHING



Double-walled door



Moulded and sloping basin for perfect emptying



Lightweight composite impellers,  
efficient even at low mains pressure

# EASY WASH PLUS T - OPEW40TLS

CODICE  
BND211014

MODELLO  
OPEW40TLS

SERIE  
WASHING

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
EWPS	EWPS	DRAIN PUMP
EWDE	EWDE	DETERGENT DISPENSER