

EASY WASH PLUS T CANOPY - OPEW11ECOT

CODICE
BND211047

MODELLO
OPEW11ECOT

SERIE
WASHING



GENERAL CHARACTERISTICS

Professional dishwashers designed to meet the needs for efficient and rapid cleaning of dishes and utensils in commercial settings, such as restaurants, hotels, and similar food facilities. Olis equipment is designed to handle a high volume of tableware and ensure high hygiene standards in commercial settings.

TECHNICAL SPECIFICATIONS

■ Glass and dishwashers, ideal for bars, pubs, restaurants and hotels. These front-loading undercounter machines, with an attractive design thanks to the renewed electromechanical control panel, offer a large loading capacity, guaranteeing maximum performance at an affordable price. The many optional extras available such as softener, detergent dispenser and drain pump allow the machine to be customised to the user's needs. ■ The many options available such as softener, detergent dispenser and drain pump allow the machine to be customised to the user's needs. ■ New electronic versions available in the T models with LED control panel that offers the display of washing

and rinsing temperatures, the selected programme, working status and main alarm codes. They also offer 4 standard washing programmes that adapt the machine's performance individually to the type of dishes to be washed.

■ Solid AISI 304 stainless steel construction ■ Moulded and sloping basin for perfect emptying ■ Integrated overflow system and drain filters for triple protection of the wash pump ■ Built-in rinse aid dispenser ■ Easy-to-remove basket support ■ easy and intuitive LED panel

EASY WASH PLUS T CANOPY - OPEW11ECOT

CODICE
BND211047

MODELLO
OPEW11ECOT

SERIE
WASHING

Technical Information

| SPECIFICATION | DATA |
|-----------------------|------------------------------------|
| MATERIAL | BND211047 |
| DEFINITION | OPEW11ECOT LAVAST.CAPOTTA MEC. 500 |
| DIM. WIDTH | 760 mm |
| DIM. PRODUCTIVITY | 840 mm |
| DIM. HEIGHT | 1500 mm |
| NET WEIGHT | 100 Kg |
| VOLUME (net) | 0,958 |
| PACKAGE LENGTH | 760 mm |
| PACKAGE WIDTH | 840 mm |
| PACKAGING HEIGHT | 1500 mm |
| PACKAGE VOLUME | 0,958 m3 |
| GROSS PACKING WEIGHT | 116 Kg |
| STANDARD POWER SUPPLY | 380-415V 3N |
| FREQUENCY | 50Hz |
| ELECTRICAL POWER | 6.9 kW |
| CERTIFICATE NR | 50/80/120/180 sec |
| WASH PUMP | 900W |
| CERTIFICATE NR | 6900W |
| WATER CONSUMPTION | 2,8 lt |

EASY WASH PLUS T CANOPY - OPEW11ECOT




weinnovate cooking

CODICE
BND211047

MODELLO
OPEW11ECOT

SERIE
WASHING

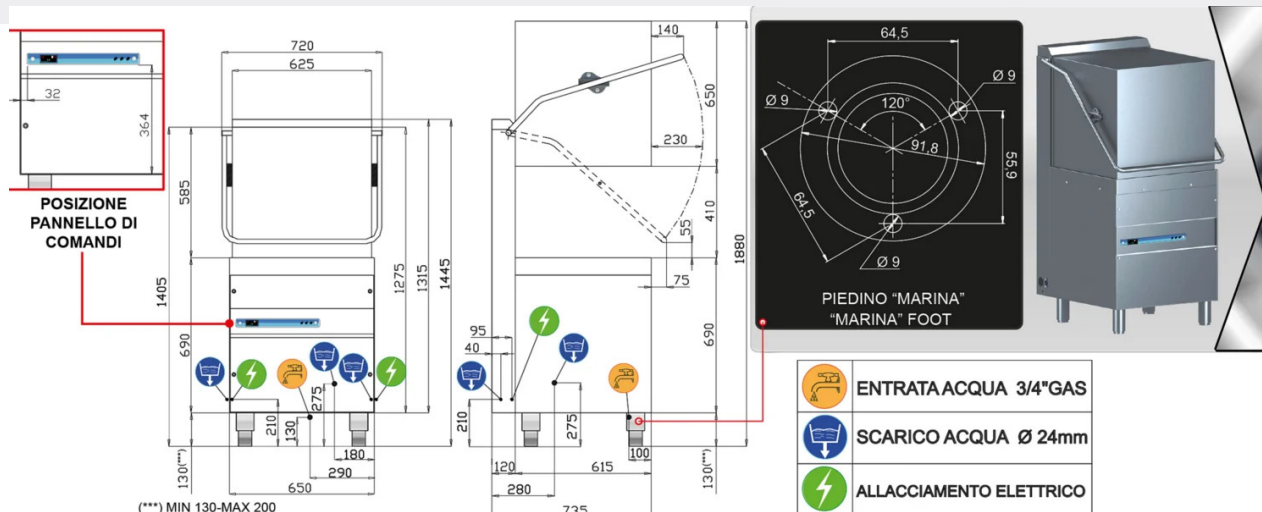

| DATI TECNICI | | | | | |
|--|---------|------------------------------------|-------|--------|--------|
| DIMENSIONI ESTERNE | | | | | |
| larghezza | | 720 mm | | | |
| profondita' | | 735 mm | | | |
| altezza(piedino avvitato) | | 1445/1880(capotta aperta) mm | | | |
| PESO (versione base) | | 100 kg | | | |
| TENSIONE DI ALIMENTAZIONE | | 400V 3N 50Hz | | | |
| POTENZA MASSIMA ASSORBITA | | 6900 W | | | |
| DUREZZA ACQUA | | 2-8 °F | | | |
| PRESSIONE ACQUA ALIMENTAZIONE | | 200-400 kPa | | | |
| ALTEZZA UTILE & CESTI | | | | | |
| diametro piatti | | 410 mm | | | |
| vassoi | | GASTRONORM 1/1 (530x325) | | | |
| DIMENSIONE CESTI | | 500X500 mm | | | |
| DOTAZIONE CESTI | | 2XC40 - 1XC44 - 2X15060 | | | |
| N° CICLI | (sec) | 1(50) | 2(80) | 3(120) | 4(180) |
| ALIMENTAZIONE ACQUA 55°C | | | | | |
| produzione cesti(*) ⁽¹⁾ | Cesti/h | 72 | 45 | 30 | 20 |
| ALIMENTAZIONE ACQUA 10°C | | | | | |
| produzione cesti(*) ⁽¹⁾ | Cesti/h | 22 | 22 | 22 | 20 |
| CONSUMO ACQUA PER CICLO (pressione idrica 200kPa) | | 2.8 l | | | |
| CAPACITA' BOILER | | 10 l | | | |
| RESISTENZA BOILER | | 6000 W | | | |
| SET. TEMPERATURA RISCIAQUO | | 85°C | | | |
| CAPACITA' VASCA | | 30 l | | | |
| RESISTENZA VASCA | | 2700 W | | | |
| SET. TEMPERATURA VASCA | | 55°C | | | |
| POTENZA POMPA | | 900 W(500 L/min***) | | | |
| pompa scarico (optional) | | 25W h MAX scarico 0,8m(40L/min***) | | | |
| RUMOROSITA' | | 63,6±0.7 dB(A) | | | |

(*) CON TERMOSTOP DI SERIE

(***) PORTATA MASSIMA

⁽¹⁾ In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO

PAGINA 1 / 1

EASY WASH PLUS T CANOPY - OPEW11ECOT

CODICE
BND211047

MODELLO
OPEW11ECOT

SERIE
WASHING

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|--------|---------|----------------------------|
| CEWDDE | CEWDDE | DETERGENT DISPENSER |
| CEWPS | CEWPS | DRAIN PUMP FOR COWL WASHER |