

4-ZONE ELECTRIC GLASS-CERAMIC COOKER ON ELECTRIC OVEN

CODICE
CR0990679

MODELLO
D94/10VTCE

SERIE
DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Unbreakable ceramic glass top.

Cooking zone (270x270mm) marked with square silk-screen printing, indicating the size of the container to be used. ■ Single zone power of 4 kW. ■ Temperature adjustable by thermostat from 70 to 450°C.

■ Unbreakable flush-mounted glass for easy handling of pans. ■ The temperature is regulated by means of an energy regulator, which

allows two heating zone widths to be selected according to the size of the pan bottom. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

4-ZONE ELECTRIC GLASS-CERAMIC COOKER ON ELECTRIC OVEN

CODICE
CR0990679

MODELLO
D94/10VTCE

SERIE
DIAMANTE 90

Technical Information


SPECIFICATION	DATA
MATERIAL	CR0990679
DEFINITION	D94/10 VTCE VETROCERAMICA 4Z. FORNO
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	124.8 Kg
VOLUME (net)	0,626
PACKAGE LENGTH	860 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	1,010 m3
GROSS PACKING WEIGHT	140 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	22,000 kW
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 VTCE

4-ZONE ELECTRIC GLASS-CERAMIC COOKER ON ELECTRIC OVEN

SERIE
DIAMANTE 90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

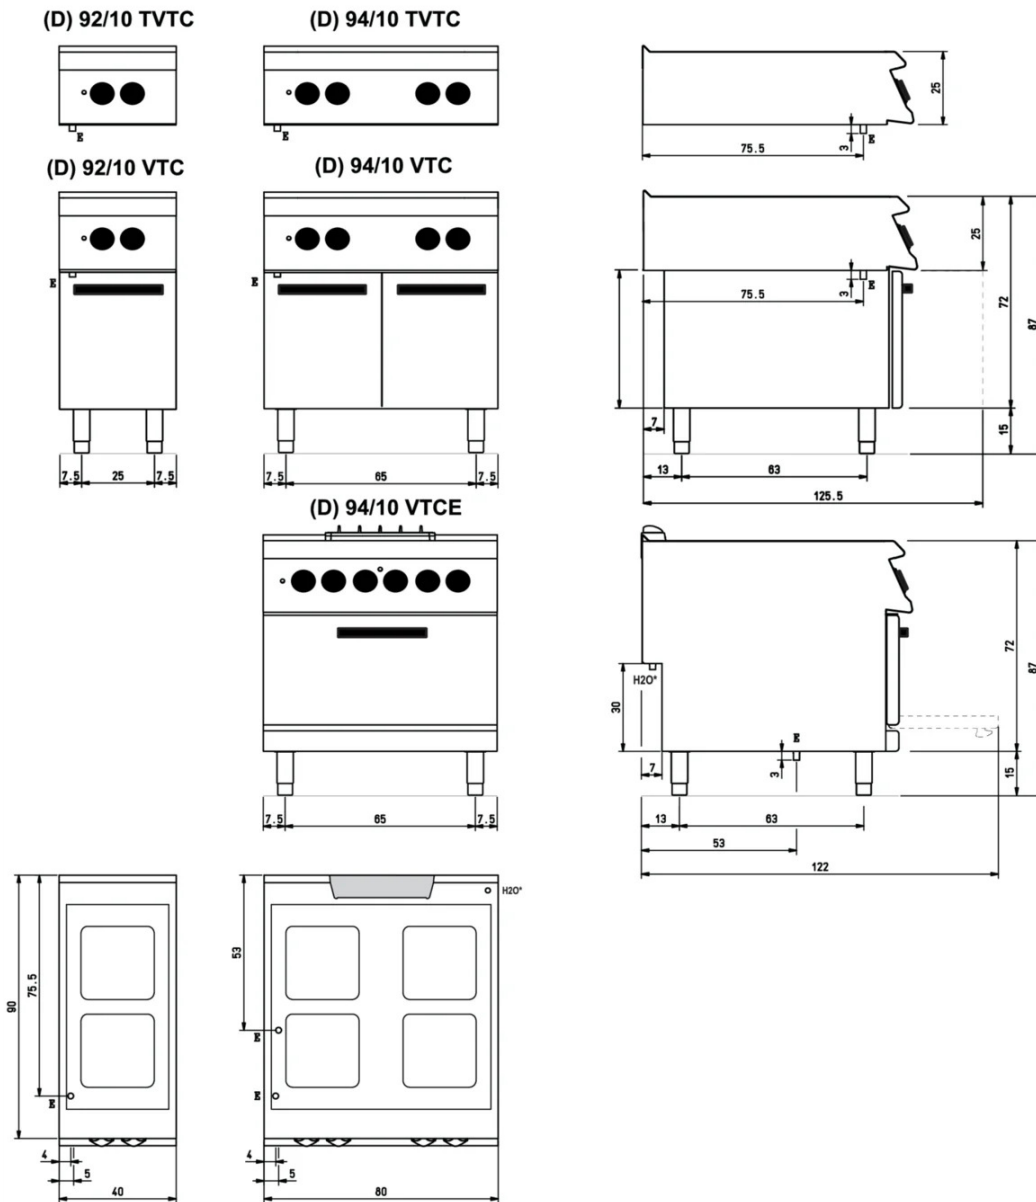

Legenda - Legende - Key - Légende - Leyenda - Legenda

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
 Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel

H2O* Attacco arrivo acqua - Wasseranschluss - Water inlet
Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 1/2

4-ZONE ELECTRIC GLASS-CERAMIC COOKER ON ELECTRIC OVEN

CODICE
CR0990679

MODELLO
D94/10VTCE

SERIE
DIAMANTE 90



Unbreakable flush-mounted glass for
easy handling of pans.



The temperature is regulated by means
of an energy regulator, which allows
two heating zone widths to be
selected according to the size of the
pan bottom.



Equipment certified for low voltage
directive 2014/35/EU according to the
international CB scheme.



Thanks to the jet-proofing certification
(IPX5) obtained through specific tests,
knobs and under-knobs can be washed,
without compromising functionality
and safety.

4-ZONE ELECTRIC GLASS-CERAMIC COOKER ON ELECTRIC OVEN

CODICE
CR0990679

MODELLO
D94/10VTCE

SERIE
DIAMANTE 90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0592799	ZF8	Front plinth - FOR INSTALLING EQUIPMENT WITH FLOOR HEIGHT 90 CM L=80
CR0592830	ZG	SKIRTING JOINT
CR0592820	9ZL	Side plinth
MA97432000	R	WHEEL KIT (2 + 2) Ø 100
MA97433000	RI	WHEEL KIT (2 + 2) Ø 101 STAINLESS STEEL
CR0592869	PZM	NO. 4 STAINLESS STEEL FEET FOR INSTALLATION ON CONCRETE PLINTH
CR0593580	9PT	No. 4 stainless steel feet for installation on tops
CR0592879	KPA	N.2 STAINLESS STEEL FEET WITH FLANGE
CR0592940	9CAT*	Water column for top equipment