

43lt ELECTRIC MANUAL BRATT PAN WITH IRON BOTTOM (Extra EU)

CODICE
CR0989979

MODELLO
D74/10KBE

SERIE
DIAMANTE 70



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Multifunctional tilting braising pan, equipment for professional catering, suitable for cooking sauces, braises and cooking with oil. ■ It guarantees high performance, exceptional firing uniformity. ■ Water supply directly into the tank via solenoid valve (can be ordered as an accessory). ■ Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.

■ IRON baking tray (available for non-EU markets) with 2 mm thickness. ■ Cooking temperature controlled by thermostat with

adjustment from 100 to 280°C. Heating via armoured incoloy heating elements. ■ Robust, double-walled, self-balancing lids made of stainless steel to reduce heat loss. ■ Large-radius tilting tank. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification obtained through specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

43lt ELECTRIC MANUAL BRATT PAN WITH IRON BOTTOM (Extra EU)

CODICE
CR0989979

MODELLO
D74/10KBE

SERIE
DIAMANTE 70

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0989979
DEFINITION	D74/10 KBE BRASIERA EL.M80 FE
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	119.8 Kg
VOLUME (net)	0,508
PACKAGE LENGTH	850 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	0,831 m3
GROSS PACKING WEIGHT	130 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	9,900 kW
IP GRADE	IPX4
CERTIFIED MODEL	D74/10 KBE

43lt ELECTRIC MANUAL BRATT PAN WITH IRON BOTTOM (Extra EU)


CODICE
CR0989979

MODELLO
D74/10KBE


SERIE
DIAMANTE 70

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

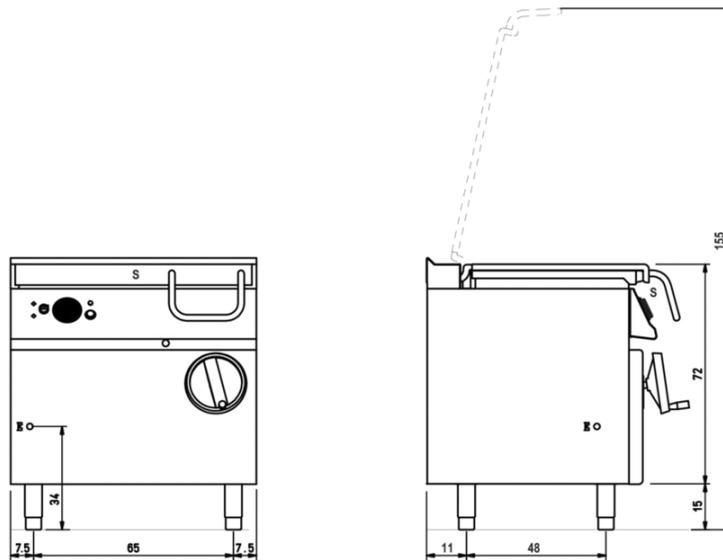

(D) 74/10 KBE ...



Legenda - Legende - Key - Légende - Leyenda - Legenda

- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- S** Scarico vasca - Wannenabflussrohr - Pan outlet
Vidange du bac - Descarga cuba - Water toevoer

43lt ELECTRIC MANUAL BRATT PAN WITH IRON BOTTOM (Extra EU)

CODICE
CR0989979

MODELLO
D74/10KBE

SERIE
DIAMANTE 70



Self-balancing lids.



Large-radius tilting tank.

Equipment certified for low voltage
directive 2014/35/EU according to the
international CB scheme.



Thanks to the jet-proofing certification
(IPX5) obtained through specific tests,
knobs and under-knobs can be washed,
without compromising functionality
and safety.

43lt ELECTRIC MANUAL BRATT PAN WITH IRON BOTTOM (Extra EU)

CODICE
CR0989979

MODELLO
D74/10KBE

SERIE
DIAMANTE 70

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0592799	ZF8	Front plinth - FOR INSTALLING EQUIPMENT WITH FLOOR HEIGHT 90 CM L=80
CR0592830	ZG	SKIRTING JOINT
MA97432000	R	WHEEL KIT (2 + 2) Ø 100
MA97433000	RI	WHEEL KIT (2 + 2) Ø 101 STAINLESS STEEL
CR0592869	PZM	NO. 4 STAINLESS STEEL FEET FOR INSTALLATION ON CONCRETE PLINTH
CR0593580	9PT	No. 4 stainless steel feet for installation on tops
CR0592879	KPA	N.2 STAINLESS STEEL FEET WITH FLANGE
CMF0708	CMF0708	Handrail L=80
CR0599649	7ZL	Side plinth