

GAS FRYER 1 BOWL 15 L

CODICE
BN12100550

MODELLO
1100/45FRG

SERIE
SERIE 1100



GENERAL CHARACTERISTICS

A complete range that stands out for its exceptional versatility and the perfect combination of modules, thanks to the use of laser cutting technology.

The 1100 Series makes it possible to create different combinations and to equip the base units with a variety of solutions: central cooking blocks on bases, on bridges and even suspended; free-standing and therefore more functional pasta cookers and fryers. All in a structure that is both sturdy and design at the same time.

AISI 304 stainless steel, Scotch Brite finish, laser-cut 2 mm thick worktops

Wide choice of burners with different power ranges (3.5Kw, 5.6 Kw, 7 Kw, 10Kw)

Burners with stabilised flame, nickel-plated cast iron

Virtually unlimited possibility of power combinations (in compliance with maximum approvals)

Tested components and high efficiency of the heating elements used

Counter tops can be equipped with pass-through ovens, hot cabinets, ventilated, neutral, cantilever and bridge ovens

Also available with plinth

TECHNICAL SPECIFICATIONS

GAS FRYER 1 BOWL 15 L

CODICE
BN12100550

MODELLO
1100/45FRG

SERIE
SERIE 1100

Technical Information

SPECIFICATION	DATA
MATERIAL	BN12100550
DEFINITION	1100/45FRG FRIGGITRICE GAS 15L
COMMERCIAL LINE	SERIE 1100
SUPPLY	GAS
DIM. WIDTH	450 mm
DIM. PRODUCTIVITY	1100 mm
DIM. HEIGHT	870 mm
NET WEIGHT	52.7 Kg
VOLUME (net)	0,431
PACKAGE LENGTH	1280 mm
PACKAGE WIDTH	510 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	0,750 m3
GROSS PACKING WEIGHT	62 Kg
GAS POWER	14,00
GAS POWER (G25.3/25mbar)	13,50
CERTIFIED MODEL	1100/45FRG
Capacity	15 litri

GAS FRYER 1 BOWL 15 L



weinnovate cooking


CODICE
BN12100550

MODELLO
1100/45FRG

SERIE
SERIE 1100

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm - MESURES EN mm
MEDIDAS EN mm - MATEN IN mm - DIMENSIONES EN mm

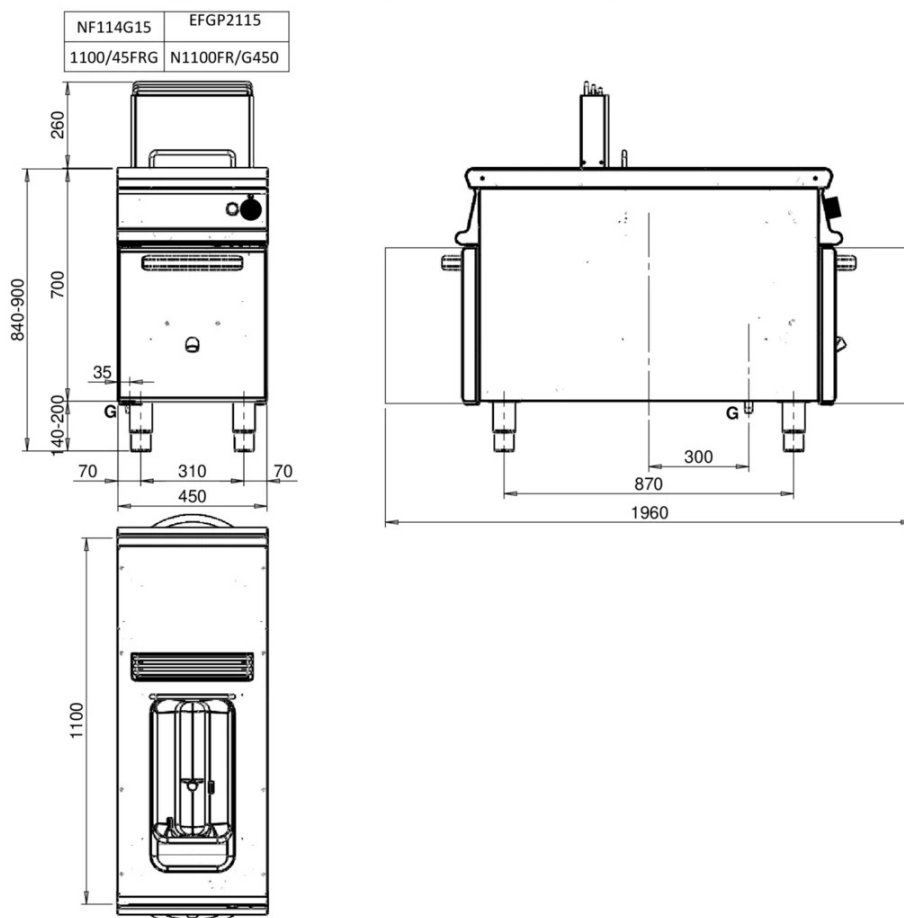

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda			
E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R1/2; EN ISO 228-1 G 1/2 (DK)
S	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
S1	Scarico vasca - Wannenabflusrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 =	Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno
S2	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	A2 =	Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S3	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	L	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível

GAS FRYER 1 BOWL 15 L

CODICE
BN12100550

MODELLO
1100/45FRG

SERIE
SERIE 1100

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1355719	CR1355719	Wheel kit
BN2590145	RUB110	Faucet 45x55x62 65 H
BN2592970	CASS45	Drawers for neutral base mod. 45 GN 1/1 h 10 cm 4 drawers
CR1011749	NZA45	FRONT SKIRTING - MODULE 450
CR1011809	NZL110	SIDE PLINTH THROUGH