

2-ZONE ELECTRIC GLASS-CERAMIC COOKER - TOP VERSION

CODICE
CR0854029

MODELLO
OV64EP

SERIE
SERIE 650



GENERAL CHARACTERISTICS

The OLIS SNACK 650 range has a design that characterises all equipment in both top and monoblock versions, with large knobs and an ergonomic dashboard shape.

The wide choice of machines and high performance make this range the ideal choice for environments that are not very spacious but still require high-performance machines.

The modularity of the range allows infinite combinations with installation on compartment bases or tables.

TECHNICAL SPECIFICATIONS

■ ELECTRIC COOKER in GLASSCERAMIC TOP version with 2 cooking zones that are marked with a circular screen print. The energy regulator allows you to set the temperature and an indicator lamp signals any residual heat on the top. The appliance is equipped with a pot presence detector device and operation indicator light. Ergonomic knobs mounted on a sloping dashboard for easy visibility.

The cooktop is stamped in one piece, AISI 304 18/10 stainless steel with Scotch Brite finish, with large radii and large capacity for overflowing liquids. ■ The electric oven of GN 1/1 dimensions is equipped with armoured heating elements on the top and bottom with independent regulation and adjustable thermostat from 110 to 280°C. ■ The glass-ceramic cookers are available in two versions: standard with a total output of 16.4 kW and enhanced with 18.4 kW in total.

2-ZONE ELECTRIC GLASS-CERAMIC COOKER - TOP VERSION

CODICE
CR0854029

MODELLO
OV64EP

SERIE
SERIE 650

Technical Information


SPECIFICATION	DATA
MATERIAL	CR0854029
DEFINITION	IRRAGGIAMENTO/P 2 Z.60 M40 OV64EP
COMMERCIAL LINE	SERIE 600
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	600 mm
DIM. HEIGHT	295 mm
NET WEIGHT	15.4 Kg
VOLUME (net)	0,071
PACKAGE LENGTH	430 mm
PACKAGE WIDTH	630 mm
PACKAGING HEIGHT	390 mm
PACKAGE VOLUME	0,106 m3
GROSS PACKING WEIGHT	20 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	5,000 kW
IP GRADE	IPX4
CERTIFIED MODEL	OV64EP

VERSION

SERIE
SERIE 650

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm
 MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

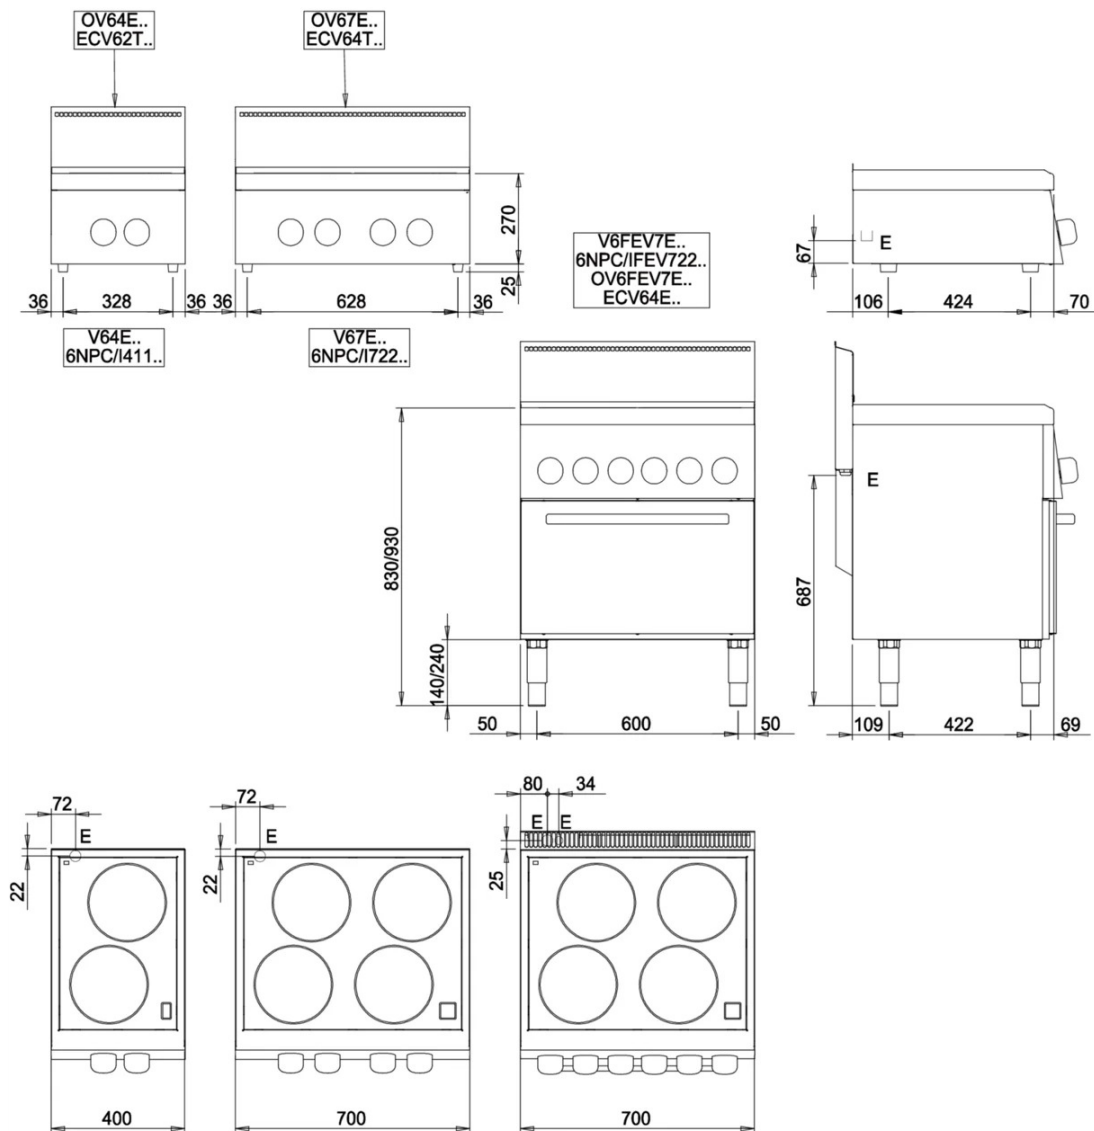

LEGENDA - LEGENDE - KEY - LEGENDE - LEYENDA - LEGENDA

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse etoupr de cable el Pisacable - Elektrische kabelwartel

2-ZONE ELECTRIC GLASS-CERAMIC COOKER - TOP VERSION

CODICE
CR0854029

MODELLO
OV64EP

SERIE
SERIE 650



The electric oven of GN 1/1 dimensions is equipped with armoured heating elements on the top and bottom with independent regulation and adjustable thermostat from 110 to 280°C.



The glass-ceramic cookers are available in two versions: standard with a total output of 16.4 kW and enhanced with 18.4 kW in total.

2-ZONE ELECTRIC GLASS-CERAMIC COOKER - TOP VERSION

CODICE
CR0854029

MODELLO
OV64EP

SERIE
SERIE 650

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0852849	OBV64	OPEN BASE size 40cm Series 650
CR0858009	OCS40	2 drawers with plastic tray GN1/1 H15cm
CR0858029	OP40D/S	door for 40 -80 compartment