

# MULTIFUNCTION FIT PAN PRODUCTION GN2/1

CODICE  
CR1659809T4W

MODELLO  
D94/10MFE-T4W

SERIE  
DIAMANTE 4.0



## GENERAL CHARACTERISTICS

Diamond 90 Touch 4.0 - Everything under control Everything is under control, perfect results every time. Thanks to the practical display, parameter selection is quick and precise. Easy and clear temperature management, and special functions are always visible and accessible from the display. Tradition and innovation, everything on your worktop A new non-slip square and rounded knob design for a more ergonomic grip and an embossed indicator that makes it easier to select the datum to be set. And with the exclusive Encoder Functionality, simply touch the parameter you want, turn the knob to adjust the level and press it to start the set datum. With water- and dirt-proof crown. Quick and precise parameter selection. Easy and clear temperature management. Special functions always visible and accessible from the display. Stainless steel outer shells and feet. Height from worktop adjustable from 840 to 900 mm. Tops with 2 mm thickness All model-identified equipment (T4W) is 4.0 Ready equipment, allowing you to benefit from all the advantages of connecting your equipment to a cloud system.

## TECHNICAL SPECIFICATIONS

■ Thermoblock' heating elements, armoured and encased in a high heat-resistant aluminium casting. ■ Automatic water filling programmable in 3 different modes: automatic with litre counter, fast, slow. ■ Use in 7 functions: fry top / BRATT PAN / pasta cooker / slow cooking / steaming / kettle / bain-marie. ■ Two USB outputs located under the dashboard (compartment area) for storing recipes and updating software. ■ Control of cooking by core probe. ■ Product discharge via dedicated hole on tray positioned on compartment. ■ Dedicated water drain with overflow. ■ Internal memory for storing pre-set recipes, transferable to another device via USB. ■ Double-walled lid without perimeter seal.

■ Fry top: A cooking plate used to cook foods such as meat, fish, vegetables and eggs in a direct way. ■ Braising pan: Used to braise or cook meat, poultry, or vegetables entirely in an aromatic liquid at a controlled temperature. ■ Pasta Cooker: An appliance designed to cook pasta in large quantities. ■ Slow cook: A low-temperature, slow-cooking method that allows meat, stews, soups, and other dishes to be cooked slowly in thermostatically controlled, eight-vacuum cooking for hours. ■ Steamer: An appliance used to cook food through steam, preserving nutrients and maintaining the texture and flavor of food. ■ Kettle: An appliance used to bring water to a boil quickly and efficiently. ■ Bain-marie: A cooking or holding technique that with placing a container of food over boiling water.

# MULTIFUNCTION FIT PAN PRODUCTION GN2/1

CODICE  
CR1659809T4W

MODELLO  
D94/10MFE-T4W

SERIE  
DIAMANTE 4.0

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR1659809T4W
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	150 Kg
VOLUME (net)	0.626
PACKAGE LENGTH	850 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1170 mm
GROSS PACKING WEIGHT	166.6 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	20 kW
IP GRADE	IPX4

# MULTIFUNCTION FIT PAN PRODUCTION GN2/1




weinnovate cooking

CODICE  
CR1659809T4W

MODELLO  
D94/10MFE-T4W

SERIE  
DIAMANTE 4.0

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm  
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

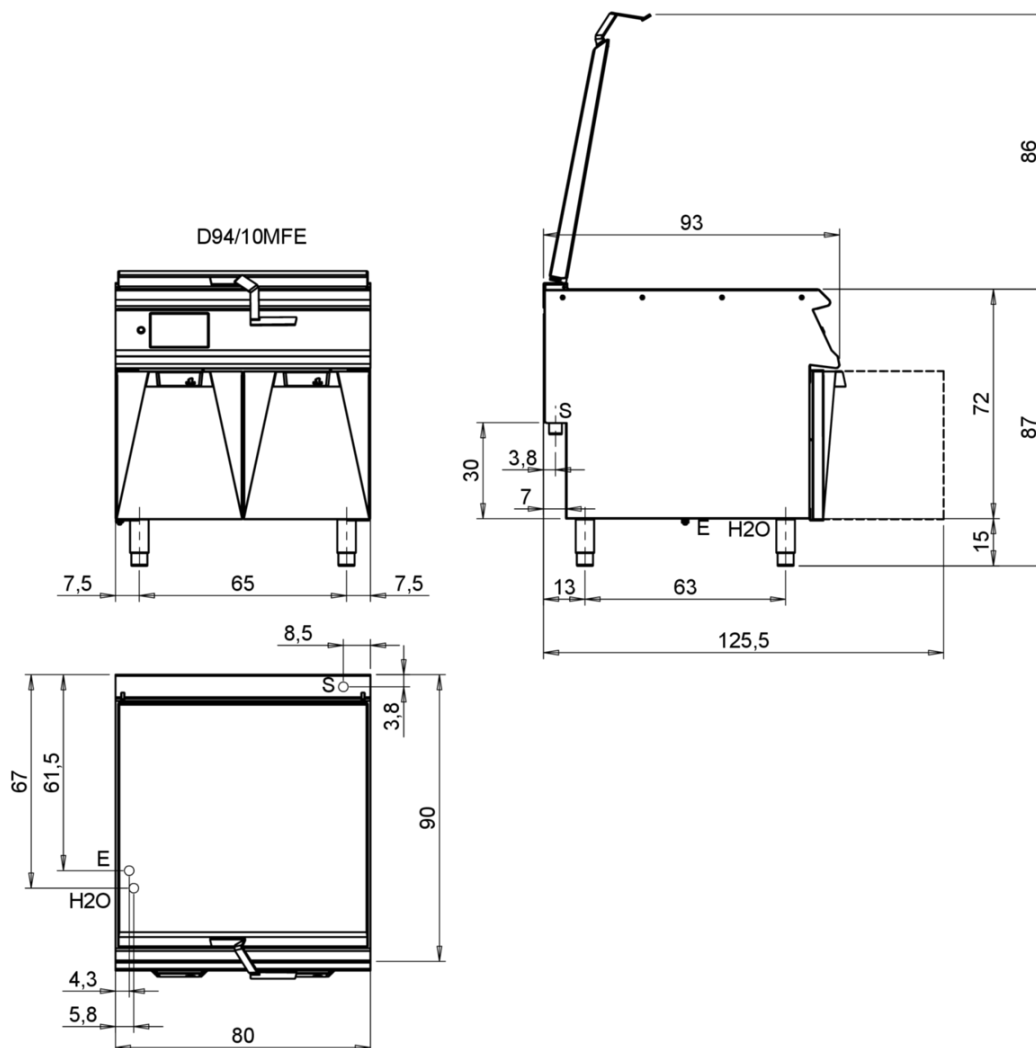

## Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda

<b>E</b>	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	<b>G</b>	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
<b>S</b>	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	<b>H20</b>	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
<b>S1</b>	Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	<b>A1 =</b>	Calda - Heiss - Warm - Chaud - Caliente - Warm - Morno
<b>S2</b>	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	<b>A2 =</b>	Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
<b>S3</b>	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	<b>L</b>	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nível
<b>S4</b>	Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno		

## MULTIFUNCTION FIT PAN PRODUCTION GN2/1

CODICE  
CR1659809T4W

MODELLO  
D94/10MFE-T4W

SERIE  
DIAMANTE 4.0



Automatic water filling with the possibility of programming litres.




Easy to understand and use Touch Screen control panel. Possibility of storing personal recipes.



Mains water drain with overflow drain and basin drain hole with sealing plug.



The PREHEAT function allows you to preheat the griddle in order to reactively cook dishes. by setting a set temperature, the equipment will set a higher temperature delta to compensate for the lowering due to the positioning of the dish



With the G-Power system, you have the ability to manage the power delivered by FitPan in an easy and customized way; the algorithm manages the power delivered in 4 + 100 variants.



Basin for draining the cooked product into the tank. Guaranteed cleanliness of the station and easy transport of products.



Control of cooking by core probe.



The ability to control 2 separate zones at different temperatures. 5 Armored heating elements high thermal resistance, maintain uniform and stable temperature over the whole surface.

## MULTIFUNCTION FIT PAN PRODUCTION GN2/1

**CODICE**  
CR1659809T4W

**MODELLO**  
D94/10MFE-T4W

**SERIE**  
DIAMANTE 4.0

### ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1659889	OFFPM	
CR1200169	GFMCF	Tank bottom grid
CR1659929	FSLM	
CR1200159	CPC1/3MCF	GN1/3 basket for pasta cooker
CR1659909	PMLM	
CR1200119	TSCMCF	Frame for slow cooking
CR1659919	PPRM	
CR0956330	SDXP	Shovel
CR0999069	CRLMCF	Trolley for multifunctional
CR1200149	CV1/3MCP	GN1/3 steamer basket 160x280x115(H)cm
CR1357479	4.0IOTENTRY	ENTRY Subscription - Cloud
CR1357499	4.0IOTPRO	PRO Subscription - Cloud