

MINI GAS SOLID TOP WITH TWO BURNERS ON THE RIGHT - TOP VERSION

CODICE
CR0993639

MODELLO
D74/10TCTGDY

SERIE
DIAMANTE 70



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Thick top plate with removable centre ring. ■ A single high-efficiency central burner that results in differentiated heat zones on the floor with a concentration of maximum heat in the centre and

decreasing temperatures in the peripheral zones. ■ Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

MINI GAS SOLID TOP WITH TWO BURNERS ON THE RIGHT - TOP VERSION

CODICE
CR0993639

MODELLO
D74/10TCTGDX

SERIE
DIAMANTE 70

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0993639
DEFINITION	D74/10 TCTGDX TUTTAPIASTRA G +2F. DX
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	250 mm
NET WEIGHT	47 Kg
VOLUME (net)	0,146
PACKAGE LENGTH	850 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	570 mm
PACKAGE VOLUME	0,411 m3
GROSS PACKING WEIGHT	60 Kg
GAS POWER	15,10
GAS POWER (G25.3/25mbar)	13,70
GAS/REFRIGERANT TYPE	GPL 28-30/37 mbar
N. FIRES/PLATES	QUATTRO FUOCHI
CERTIFIED MODEL	D74/10 TCTGDX

MINI GAS SOLID TOP WITH TWO BURNERS ON THE RIGHT - TOP VERSION


CODICE
CR0993639

MODELLO
D74/10TCTGDx

SERIE
DIAMANTE 70

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

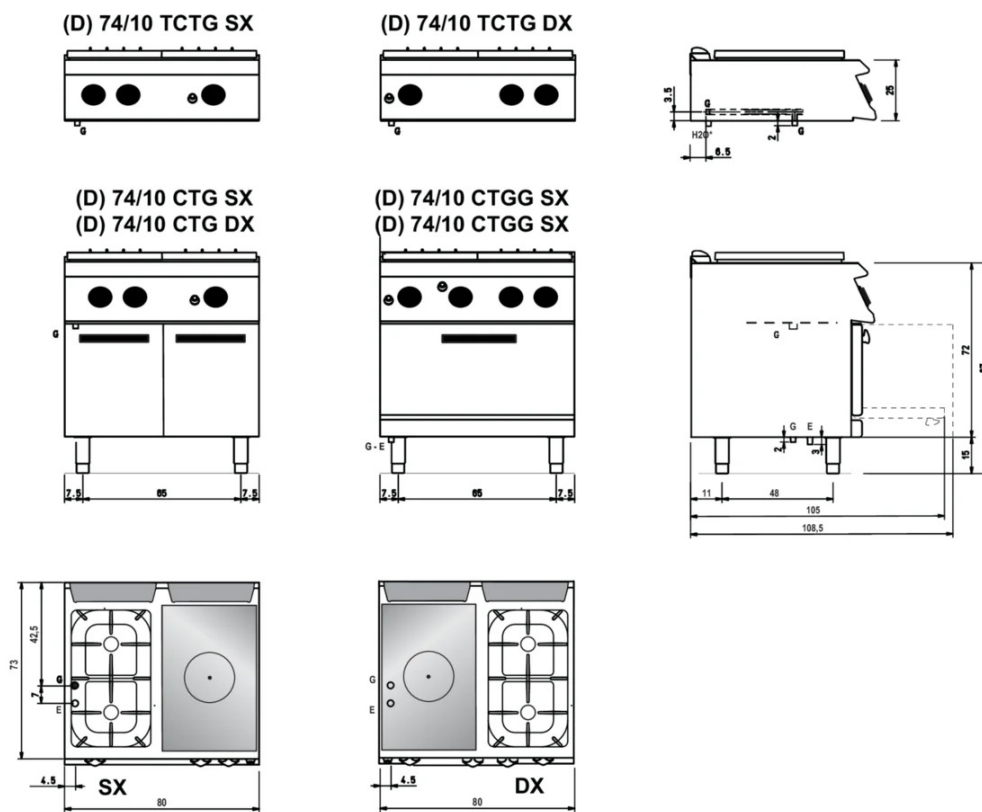

Legenda - Legende - Key - Légende - Leyenda - Legenda

G Attacco arrivo gas - Gasanschluss - Gas connection
Arrivée gaz - Union de gas - Gasaansluiting
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)

H2O* Attacco arrivo acqua - Wasseranschluss - Water inlet
Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 3/4

MINI GAS SOLID TOP WITH TWO BURNERS ON THE RIGHT - TOP VERSION

CODICE
CR0993639

MODELLO
D74/10TCTGDX

SERIE
DIAMANTE 70



Thick top plate with removable centre ring.



A single high-efficiency central burner that results in differentiated heat zones on the floor with a concentration of maximum heat in the centre and decreasing temperatures in the peripheral zones.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

MINI GAS SOLID TOP WITH TWO BURNERS ON THE RIGHT - TOP VERSION

CODICE
CR0993639

MODELLO
D74/10TCTGDX

SERIE
DIAMANTE 70

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1353829	CR1353829	RIBBED RADIANT PLATE
CR1353819	CR1353819	Smooth cast iron radiant plate
CR1354809	D74/10B	Open base 80cm Series 70
CR0996979	DBVP4	Diamond door 39.5x3.6x46.5 cm for 40 cm compartments
CR0997009	DBVPA4	Accessory Diamond door 39.5x3.6x46.5 cm for 40 cm compartments
CR0997029	DAPC	Accessories for accessory diamond knife holder
CR0997019	DAPD	Accessories for Diamond door accessories
CR0997039	DAPS	Accessories for diamond spice rack
CR0997049	DAPM	Accessories for accessory Diamond door
CR0997059	DAPDB	Accessories for accessory Diamond door/bottle holders
CR1353589	DBVC4	Drawer kit 39.5x56x46.5 cm for compartments of 40