

# 4-ZONE ELECTRIC GLASS-CERAMIC COOKER ON ELECTRIC OVEN

CODICE  
CR0990269

MODELLO  
D74/10VTCE

SERIE  
DIAMANTE 70



## GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200. Wide range of accessories.

## TECHNICAL SPECIFICATIONS

■ Cooking zones marked with circular silk-screen printing 23 cm in diameter. ■ The temperature is adjusted by energy regulator, which allows the width of the heating zone to be selected according to the size of the bottom of the pot.

■ Unbreakable flush-mounted glass for easy handling of pans. ■ The temperature is regulated by means of an energy regulator, which allows two heating zone widths to be selected according to the size of the pan bottom. ■ Equipment certified for low voltage directive

2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety. ■ Plates with safety thermostat that automatically activates in case of no-load or over-temperature use. ■ Hermetically sealed 6 mm thick glass-ceramic cooktop with four independent cooking zones. Each zone includes a circular radiant element with a diameter of 230 mm and an output of 2.5 kW.

# 4-ZONE ELECTRIC GLASS-CERAMIC COOKER ON ELECTRIC OVEN

CODICE  
CR0990269

MODELLO  
D74/10VTCE

SERIE  
DIAMANTE 70

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990269
DEFINITION	D74/10 VTCE VETROCERAMICA 4Z. FORNO
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	109.8 Kg
VOLUME (net)	0,508
PACKAGE LENGTH	850 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	0,831 m3
GROSS PACKING WEIGHT	120 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	16,000 kW
IP GRADE	IPX4
CERTIFIED MODEL	D74/10 VTCE

# 4-ZONE ELECTRIC GLASS-CERAMIC COOKER ON ELECTRIC OVEN


CODICE  
CR0990269

MODELLO  
D74/10VTCE

SERIE  
DIAMANTE 70

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

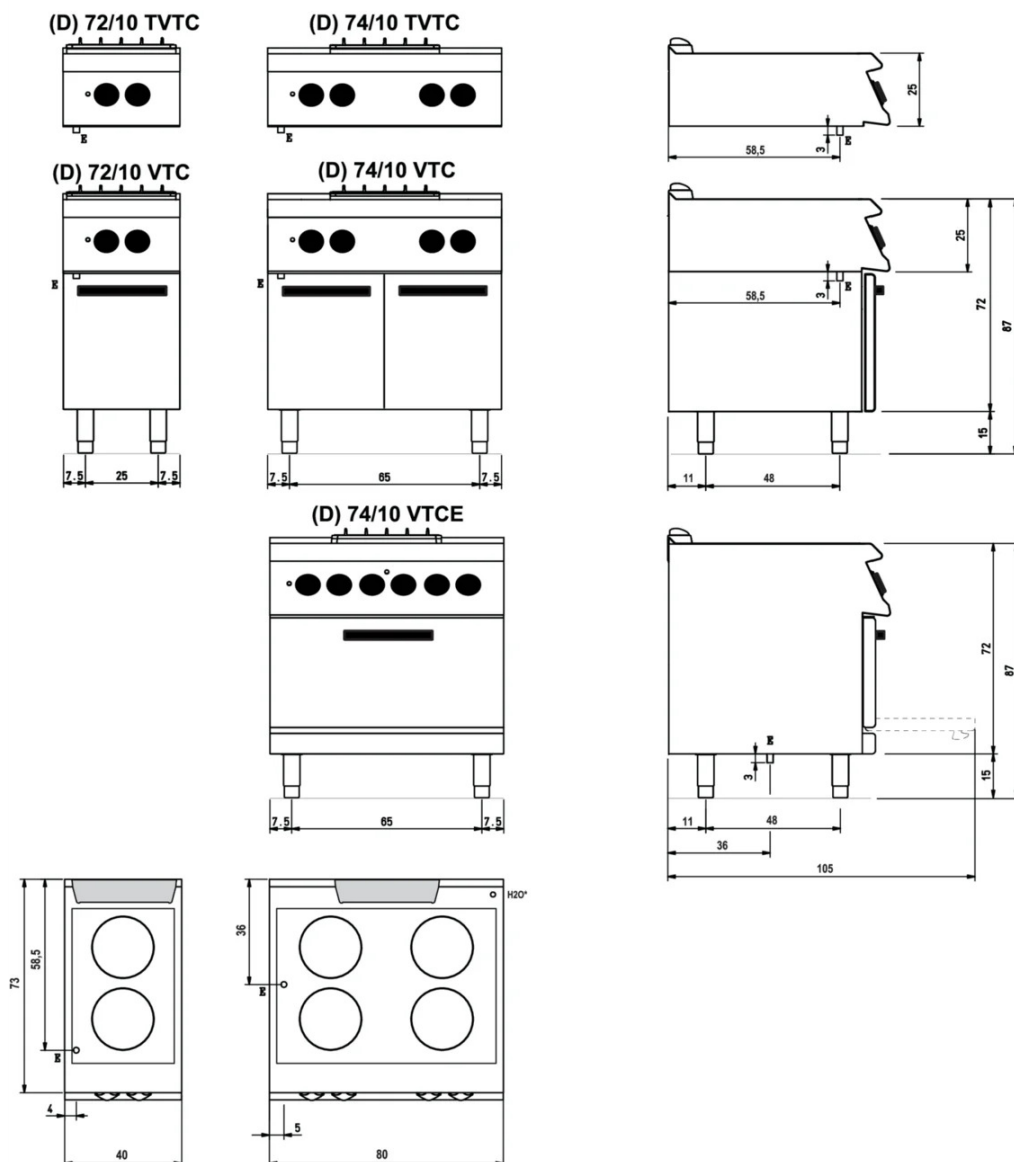

Legenda - Legende - Key - Légende - Leyenda - Legenda

**E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief  
Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel

**H2O\*** Attacco arrivo acqua - Wasseranschluss - Water inlet  
Arrivée eau - Union de agua - Wateraansluiting  
**EN ISO 228-1 G 1/2**

## 4-ZONE ELECTRIC GLASS-CERAMIC COOKER ON ELECTRIC OVEN

CODICE  
CR0990269

MODELLO  
D74/10VTCE

SERIE  
DIAMANTE 70



Unbreakable flush-mounted glass for  
easy handling of pans.



The temperature is regulated by means  
of an energy regulator, which allows  
two heating zone widths to be  
selected according to the size of the  
pan bottom.



Equipment certified for low voltage  
directive 2014/35/EU according to the  
international CB scheme.



Thanks to the jet-proofing certification  
(IPX5) obtained through specific tests,  
knobs and under-knobs can be washed,  
without compromising functionality  
and safety.