

## ELECTRIC PASTA COOKER 2 BASINS 28 LITRES

CODICE  
CR0990069

MODELLO  
D74/10CPE

SERIE  
DIAMANTE 70



### GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200. Wide range of accessories.

### TECHNICAL SPECIFICATIONS

■ Safety pressure switch to prevent activation of heating without water in the tank. ■ Water loading by means of solenoid valve. ■

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

# ELECTRIC PASTA COOKER 2 BASINS 28 LITRES

CODICE  
CR0990069

MODELLO  
D74/10CPE

SERIE  
DIAMANTE 70

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990069
DEFINITION	D74/10 CPE CUOCIPASTA EL. M80 2V.28+28LT
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	60 Kg
VOLUME (net)	0,508
PACKAGE LENGTH	840 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1170 mm
PACKAGE VOLUME	0,836 m3
GROSS PACKING WEIGHT	73 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	11,340 kW
TENSION	400
IP GRADE	IPX4
CERTIFIED MODEL	D74/10 CPE
Capacity	40 litri

# ELECTRIC PASTA COOKER 2 BASINS 28 LITRES


CODICE  
CR0990069

MODELLO  
D74/10CPE

SERIE  
DIAMANTE 70

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

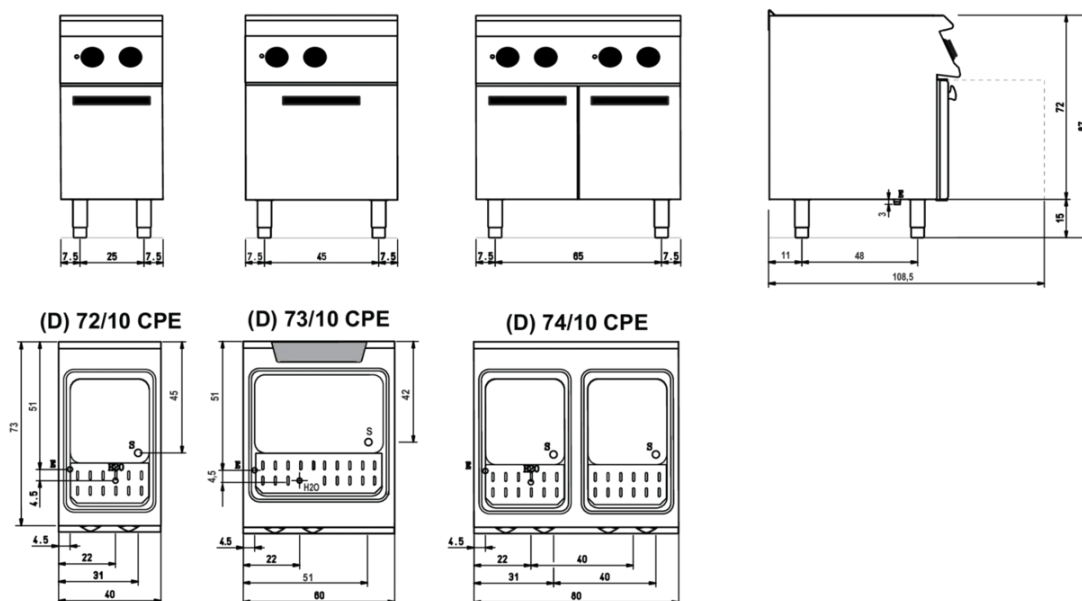

### Legenda - Legende - Key - Légende - Leyenda - Legend

**H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet

Arrivée eau - Union de agua - Wateraansluiting

**EN ISO 228-1 G 3/4**

**E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief

Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel

**S** Attacco scarico acqua - Wasserablauf - Water outlet

Vidange de l'eau - Desagadero - Wateraftapaansluiting

**EN 10226-1 R 1**

## ELECTRIC PASTA COOKER 2 BASINS 28 LITRES

CODICE  
CR0990069

MODELLO  
D74/10CPE

SERIE  
DIAMANTE 70



Safety pressure switch to prevent activation of heating without water in the tank.



Water loading by means of solenoid valve.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

## ELECTRIC PASTA COOKER 2 BASINS 28 LITRES

CODICE  
CR0990069

MODELLO  
D74/10CPE

SERIE  
DIAMANTE 70

### ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0592799	ZF8	Front plinth - FOR INSTALLING EQUIPMENT WITH FLOOR HEIGHT 90 CM L=80
CR0592830	ZG	SKIRTING JOINT
MA97432000	R	WHEEL KIT (2 + 2) Ø 100
MA97433000	RI	WHEEL KIT (2 + 2) Ø 101 STAINLESS STEEL
CR0592869	PZM	NO. 4 STAINLESS STEEL FEET FOR INSTALLATION ON CONCRETE PLINTH
CR0593580	9PT	No. 4 stainless steel feet for installation on tops
CR0592879	KPA	N.2 STAINLESS STEEL FEET WITH FLANGE
CMF0708	CMF0708	Handrail L=80
CR0599649	7ZL	Side plinth
CR0999109	CCP16D	BASKET GN1/6 RIGHT-HAND HANDLE
CR0999079	CCP12	BASKET GN1/2 SIDE HANDLE
CR0999089	CCP13L	BASKET GN1/3 SIDE HANDLE
CR0999099	CCP13F	BASKET GN1/3 FRONT HANDLE
CR0999119	CCP16S	BASKET GN1/6 LEFT HANDLE
CR0999129	CCP19	BASKET GN1/9 FRONT HANDLE
CR0999159	CVCP26	TANK LID 26LT
CR0999229	7KIT-A	PASTA COOKER KIT
CR0999239	7KIT-B	PASTA COOKER KIT
CR0999249	7KIT-C	PASTA COOKER KIT