

21lt MULTIPURPOSE ELECTRIC BRATT PAN

CODICE
CR1207449

MODELLO
DPKBEF60

SERIE
DROP-IN 7



GENERAL CHARACTERISTICS

A complete and versatile built-in range. Compatible with all types of furniture including exposed solutions, the Olis DROP-IN range makes the most of space. It also allows for a large number of customised built-in solutions.

TECHNICAL SPECIFICATIONS

21lt MULTIPURPOSE ELECTRIC BRATT PAN

CODICE
CR1207449

MODELLO
DPKBEF60

SERIE
DROP-IN 7

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1207449
DEFINITION	DPKBEF60 MULTIPLA M60 DROP-IN
COMMERCIAL LINE	SERIE DROP IN
SUPPLY	ELECTRICS
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	625 mm
DIM. HEIGHT	250 mm
NET WEIGHT	40 Kg
VOLUME (net)	0,094
PACKAGE LENGTH	640 mm
PACKAGE WIDTH	740 mm
PACKAGING HEIGHT	570 mm
PACKAGE VOLUME	0,269 m3
GROSS PACKING WEIGHT	50.8 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	8,100 kW
IP GRADE	IPX5
CERTIFIED MODEL	DPKBEF60

21lt MULTIPURPOSE ELECTRIC BRATT PAN


CODICE
CR1207449

MODELLO
DPKBEF60

SERIE
DROP-IN 7

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

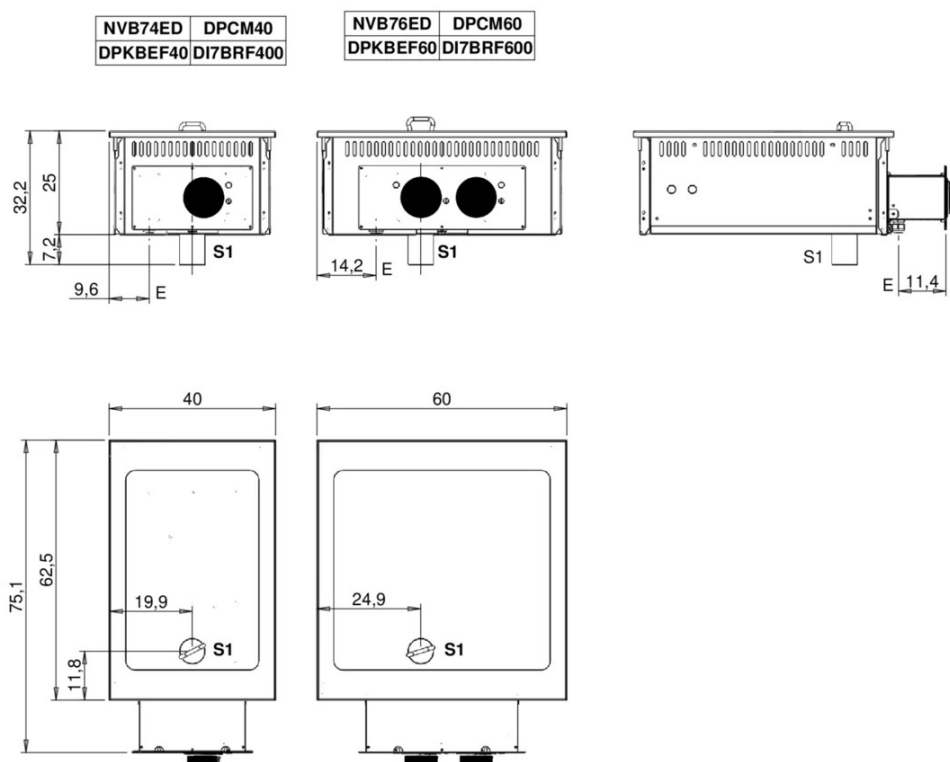

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda			
E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
S	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Waterafropaansluiting - Junção descarga água	H20	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
S1	Scarico vasca - Wannenabflusrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba Ø= 6 cm	A1 =	Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno
S2	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	A2 =	Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S3	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de água interstícios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto		
S4	Scarico - Abflusrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	L	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nível - Niveaakraan - Torneira de nível

21lt MULTIPURPOSE ELECTRIC BRATT PAN

CODICE
CR1207449

MODELLO
DPKBEF60

SERIE
DROP-IN 7



An elegant and contemporary solution. Thanks to the special frame kit, which can be ordered as an accessory, the edge of the equipment remains flush with the worktop, creating a whole between equipment and worktop



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1201910	CR1201910	FRAME KIT FOR FLUSH FLOOR INSTALLATION - M60