

ELECTRIC GLASS-CERAMIC COOKER 2 TOP ZONES

CODICE
CR0990639

MODELLO
D92/10TVTC

SERIE
DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Unbreakable ceramic glass top.
Cooking zone (270x270mm) marked with square silk-screen printing, indicating the size of the container to be used. ■ Single zone power of 4 kW. ■ Temperature adjustable by thermostat from 70 to 450°C.

■ Unbreakable flush-mounted glass for easy handling of pans. ■ The temperature is regulated by means of an energy regulator, which

allows two heating zone widths to be selected according to the size of the pan bottom. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

ELECTRIC GLASS-CERAMIC COOKER 2 TOP ZONES

CODICE
CR0990639

MODELLO
D92/10TVTC

SERIE
DIAMANTE 90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990639
DEFINITION	D92/10 TVTC VETROCERAMICA 2Z. TOP
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	250 mm
NET WEIGHT	30 Kg
VOLUME (net)	0,090
PACKAGE LENGTH	440 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	550 mm
PACKAGE VOLUME	0,248 m3
GROSS PACKING WEIGHT	38 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	8,000 kW
IP GRADE	IPX5
CERTIFIED MODEL	D92/10TVTC

ELECTRIC GLASS-CERAMIC COOKER 2 TOP ZONES


CODICE
CR0990639

MODELLO
D92/10TVTC

SERIE
DIAMANTE 90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

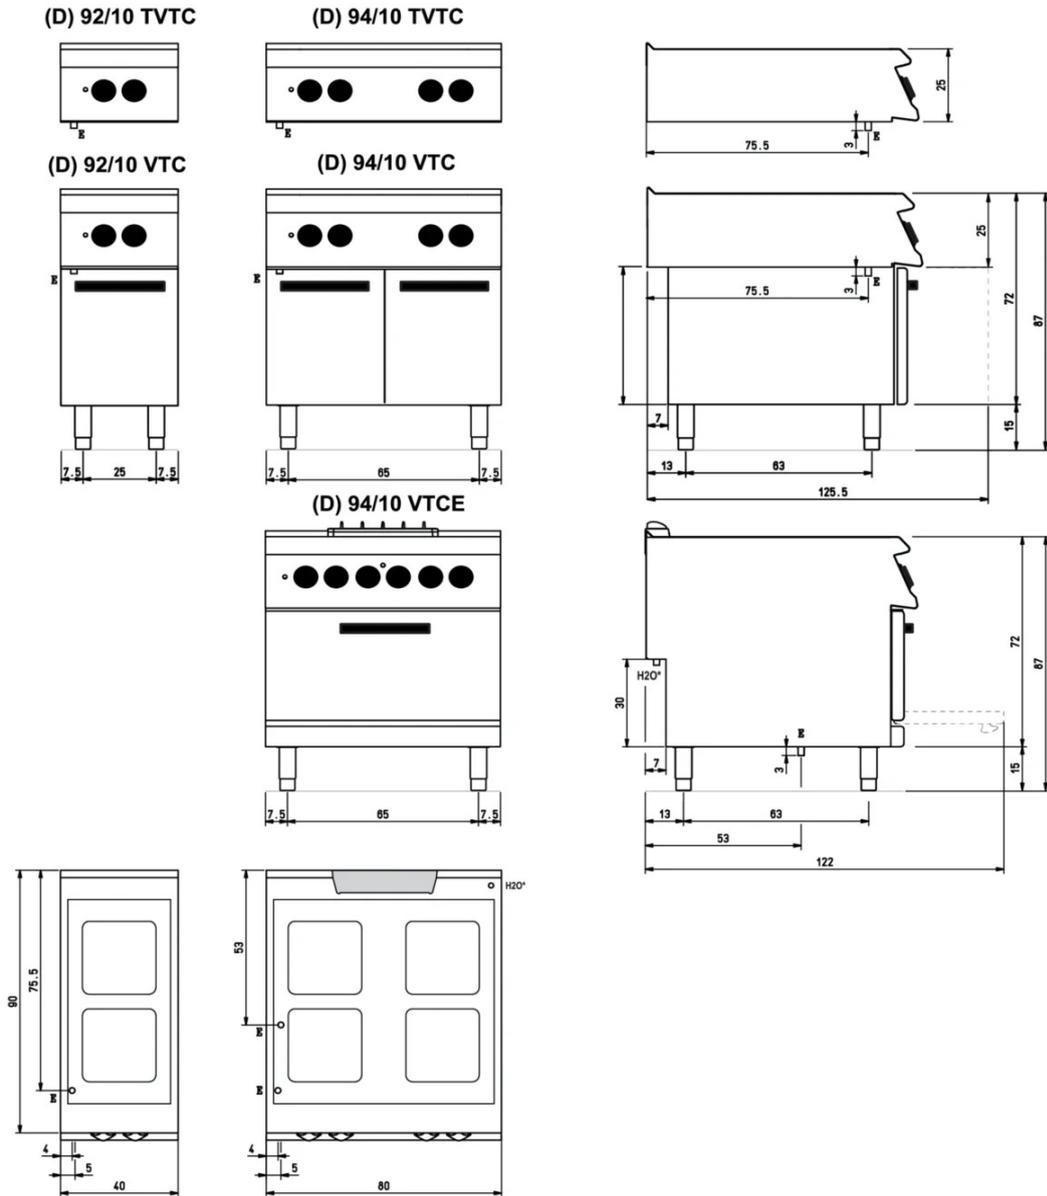

Legenda - Legende - Key - Légende - Leyenda - Legend

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel

H2O* Attacco arrivo acqua - Wasseranschluss - Water inlet
Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 1/2

ELECTRIC GLASS-CERAMIC COOKER 2 TOP ZONES

CODICE
CR0990639

MODELLO
D92/10TVTC

SERIE
DIAMANTE 90



Unbreakable flush-mounted glass for easy handling of pans.



The temperature is regulated by means of an energy regulator, which allows two heating zone widths to be selected according to the size of the pan bottom.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

ELECTRIC GLASS-CERAMIC COOKER 2 TOP ZONES

CODICE
CR0990639

MODELLO
D92/10TVTC

SERIE
DIAMANTE 90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1355449	D92/10B	Open base 40cm series 90
CR0996979	DBVP4	Diamond door 39.5x3.6x46.5 cm for 40 cm compartments
CR0997009	DBVPA4	Accessory Diamond door 39.5x3.6x46.5 cm for 40 cm compartments
CR0997029	DAPC	Accessories for accessory diamond knife holder
CR0997019	DAPD	Accessories for Diamond door accessories
CR0997039	DAPS	Accessories for diamond spice rack
CR0997049	DAPM	Accessories for accessory Diamond door
CR0997059	DAPDB	Accessories for accessory Diamond door/bottle holders
CR1353589	DBVC4	Drawer kit 39.5x56x46.5 cm for compartments of 40
CR0592659	92/10BH	Open base - Hygienic finish H2 40cm Series 90
CR1353559	DRG11	Grids for 40cm compartment 10x60x32 cm 6 Grids
CR0592329	9FC40	Warm bottom for 32x80x6 cm compartments mod. 40 cm 1kW Ac230 1N
CR0592779	ZF4	Front plinth - FOR INSTALLING EQUIPMENT WITH FLOOR HEIGHT 90 CM L=40
CR0592830	ZG	SKIRTING JOINT
CR0592820	9ZL	Side plinth
MA97432000	R	WHEEL KIT (2 + 2) Ø 100
MA97433000	RI	WHEEL KIT (2 + 2) Ø 101 STAINLESS STEEL
CR0592869	PZM	NO. 4 STAINLESS STEEL FEET FOR INSTALLATION ON CONCRETE PLINTH
CR0593580	9PT	No. 4 stainless steel feet for installation on tops
CR0592879	KPA	N.2 STAINLESS STEEL FEET WITH FLANGE
CR0592940	9CAT*	Water column for top equipment