

4-BURNER GAS COOKER

CODICE
CR1207319

MODELLO
DPCG80

SERIE
DROP-IN 7



GENERAL CHARACTERISTICS

A complete and versatile built-in range. Compatible with all types of furniture including exposed solutions, the Olis DROP-IN range makes the most of space. It also allows for a large number of customised built-in solutions.

TECHNICAL SPECIFICATIONS

4-BURNER GAS COOKER

CODICE
CR1207319

MODELLO
DPCG80

SERIE
DROP-IN 7

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1207319
DEFINITION	DPCG80 4 FUOCHI DROP-IN
COMMERCIAL LINE	SERIE DROP IN
SUPPLY	GAS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	740 mm
DIM. HEIGHT	295 mm
NET WEIGHT	0 Kg
VOLUME (net)	0,175
PACKAGE LENGTH	830 mm
PACKAGE WIDTH	830 mm
PACKAGING HEIGHT	570 mm
PACKAGE VOLUME	0,392 m3
GROSS PACKING WEIGHT	40 Kg
GAS POWER	18,40
GAS POWER (G25.3/25mbar)	17,96
N. FIRES/PLATES	QUATTRO FUOCHI
CERTIFIED MODEL	DPCG80

4-BURNER GAS COOKER

CODICE
CR1207319


MODELLO
DPCG80

SERIE
DROP-IN 7

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

DPCG40 DI7PCG40
DPCG80 DI7PCG80

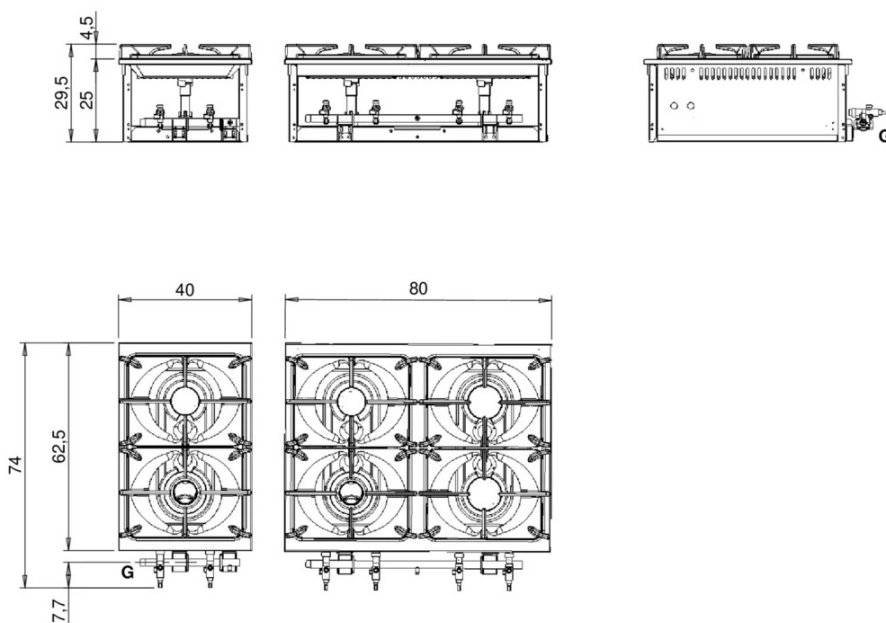

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R1/2; EN ISO 228-1 G1/2 (DK)
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflusrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	
S4 Scarico - Abflusrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nível - Niveaakraan - Torneira de nível

4-BURNER GAS COOKER

CODICE
CR1207319

MODELLO
DPCG80

SERIE
DROP-IN 7



An elegant and contemporary solution. Thanks to the special frame kit, which can be ordered as an accessory, the edge of the equipment remains flush with the worktop, creating a whole between equipment and worktop



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

4-BURNER GAS COOKER

CODICE
CR1207319

MODELLO
DPCG80

SERIE
DROP-IN 7

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1201920	CR1201920	FRAME KIT FOR FLUSH INSTALLATION - M80
CR1201950	CR1201950	FRAME KIT FOR FREE-STANDING INSTALLATION - M80
BN418031910010	7PRL	SMOOTH RADIANT PLATE
BN418031910020	7PRR	RIBBED RADIANT PLATE
BN826190250	N7BA	REMOVABLE BASIN
BN826330160	BN826330160	Stainless steel double-fire grill 39x58