

2-ZONE ELECTRIC INDUCTION COOKER

CODICE
CR1359039

MODELLO
DPCI40

SERIE
DROP-IN 7



GENERAL CHARACTERISTICS

A complete and versatile built-in range. Compatible with all types of furniture including exposed solutions, the Olis DROP-IN range makes the most of space. It also allows for a large number of customised built-in solutions.

TECHNICAL SPECIFICATIONS

■ - 2 ZONE ELECTRIC INDUCTION STOVE

- Stainless steel outer linings and feet.
- 6 mm thick glass-ceramic top.
- Each cooking zone is marked with
- a circular serigraphy.

- Heating obtained with an inductance
- equipped with a device that detects the presence
- of the cooking vessel on the cooking zone
- cooking zone and automatically turns on/off
- the heating, and device against
- overheating.
- Power 5 kW cada zone

2-ZONE ELECTRIC INDUCTION COOKER

CODICE
CR1359039

MODELLO
DPCI40

SERIE
DROP-IN 7

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1359039
DEFINITION	DPCI40 INDUZIONE TOP M40 DROP-IN
COMMERCIAL LINE	SERIE DROP IN
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	625 mm
DIM. HEIGHT	250 mm
NET WEIGHT	0 Kg
VOLUME (net)	0,063
PACKAGE LENGTH	830 mm
PACKAGE WIDTH	430 mm
PACKAGING HEIGHT	440 mm
PACKAGE VOLUME	0,157 m3
GROSS PACKING WEIGHT	26 Kg
STANDARD POWER SUPPLY	400V 3
FREQUENCY	50/60 Hz
ELECTRICAL POWER	10,000 kW
IP GRADE	IPX4
CERTIFIED MODEL	DPCI40

2-ZONE ELECTRIC INDUCTION COOKER

CODICE
CR1359039


MODELLO
DPCI40

SERIE
DROP-IN 7

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

NI74TED	DPCI40
DPCI40	DI7PCIND400

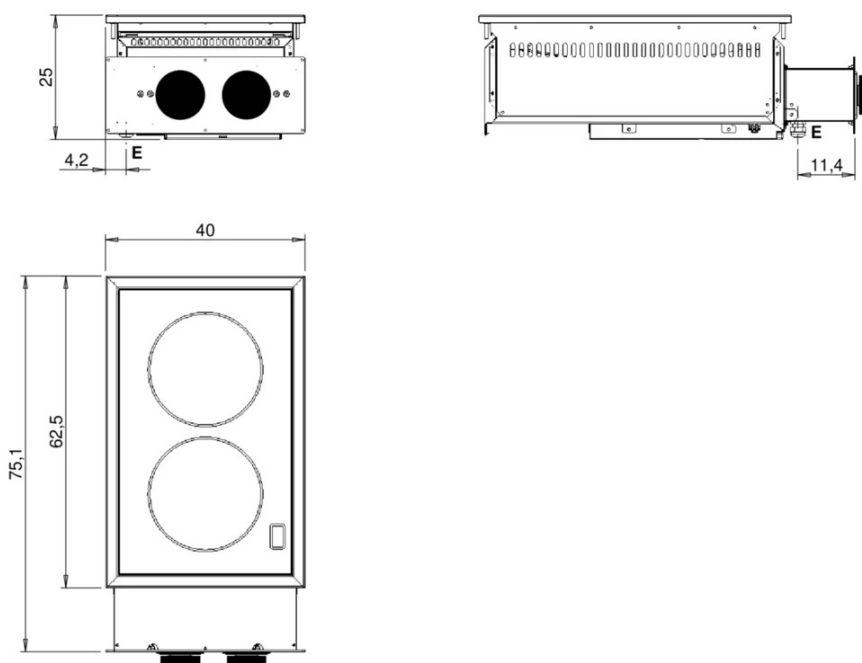

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda			
E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
S	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
S1	Scarico vasca - Wannenabflusrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 =	Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno
S2	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	A2 =	Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S3	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de água interstícios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	L	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nível - Niveaakraan - Torneira de nível
S4	Scarico - Abflusrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno		

2-ZONE ELECTRIC INDUCTION COOKER

CODICE
CR1359039

MODELLO
DPCI40

SERIE
DROP-IN 7



An elegant and contemporary solution. Thanks to the special frame kit, which can be ordered as an accessory, the edge of the equipment remains flush with the worktop, creating a whole between equipment and worktop



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

2-ZONE ELECTRIC INDUCTION COOKER

CODICE
CR1359039

MODELLO
DPCI40

SERIE
DROP-IN 7

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1201900	CR1201900	FRAME KIT FOR FLUSH INSTALLATION - M40
CR1201930	CR1201930	FRAME KIT FOR FREE-STANDING INSTALLATION - M40