

## 2 ZONE INDUCTION STOVE ON OPEN COMPARTMENT

CODICE  
BN12101420

MODELLO  
1100/45GCII

SERIE  
SERIE 1100



### GENERAL CHARACTERISTICS

A complete range that stands out for its exceptional versatility and the perfect combination of modules, thanks to the use of laser cutting technology.

The 1100 Series makes it possible to create different combinations and to equip the base units with a variety of solutions: central cooking blocks on bases, on bridges and even suspended; free-standing and therefore more functional pasta cookers and fryers. All in a structure that is both sturdy and design at the same time.

AISI 304 stainless steel, Scotch Brite finish, laser-cut 2 mm thick worktops

Wide choice of burners with different power ranges (3.5Kw, 5.6 Kw, 7 Kw, 10Kw)

Burners with stabilised flame, nickel-plated cast iron

Virtually unlimited possibility of power combinations (in compliance with maximum approvals)

Tested components and high efficiency of the heating elements used

Counter tops can be equipped with pass-through ovens, hot cabinets, ventilated, neutral, cantilever and bridge ovens

Also available with plinth

### TECHNICAL SPECIFICATIONS

■ Unbreakable glass-ceramic top. ■ Heating by means of an inductor equipped with a device that detects the presence of the cooking vessel on the cooking zone and automatically switches the heating on/off, and a device against overheating. ■ The power of 5 kW for each zone is the ideal solution to ensure high efficiency and optimal performance.

■ Stainless steel outer coatings and Scotch Brite finish. ■ 2 mm thick stainless steel work surface. ■ Contoured dashboards with controls angled toward the operator. ■ 6 mm thick glass-ceramic surface, perfectly sealed to the top to ensure an airtight seal. ■ Cooking zones marked with circular silk-screen printing 28 cm in diameter ■ 5 kW single zone power. ■ Innovative cookware recognition system that automatically starts heating when the cooking vessel is present-anti-overheating. ■ Heating activity indicator light.

## 2 ZONE INDUCTION STOVE ON OPEN COMPARTMENT

CODICE  
BN12101420

MODELLO  
1100/45GCII

SERIE  
SERIE 1100

### Technical Information

SPECIFICATION	DATA
MATERIAL	BN12101420
DEFINITION	1100/45 GCII INDUZIONE M45 110/06
COMMERCIAL LINE	SERIE 1100
SUPPLY	ELECTRICS
DIM. WIDTH	450 mm
DIM. PRODUCTIVITY	1100 mm
DIM. HEIGHT	870 mm
NET WEIGHT	108 Kg
VOLUME (net)	0,431
PACKAGE LENGTH	510 mm
PACKAGE WIDTH	1280 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	0,750 m3
GROSS PACKING WEIGHT	130 Kg
STANDARD POWER SUPPLY	380-415V 3
FREQUENCY	50/60 Hz
ELECTRICAL POWER	10,000 kW
N. FIRES/PLATES	QUATTRO FUOCHI
IP GRADE	IPX5
CERTIFIED MODEL	1100/45 GCII

## 2 ZONE INDUCTION STOVE ON OPEN COMPARTMENT


CODICE  
BN12101420

MODELLO  
1100/45GCII

SERIE  
SERIE 1100

### SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm  
MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

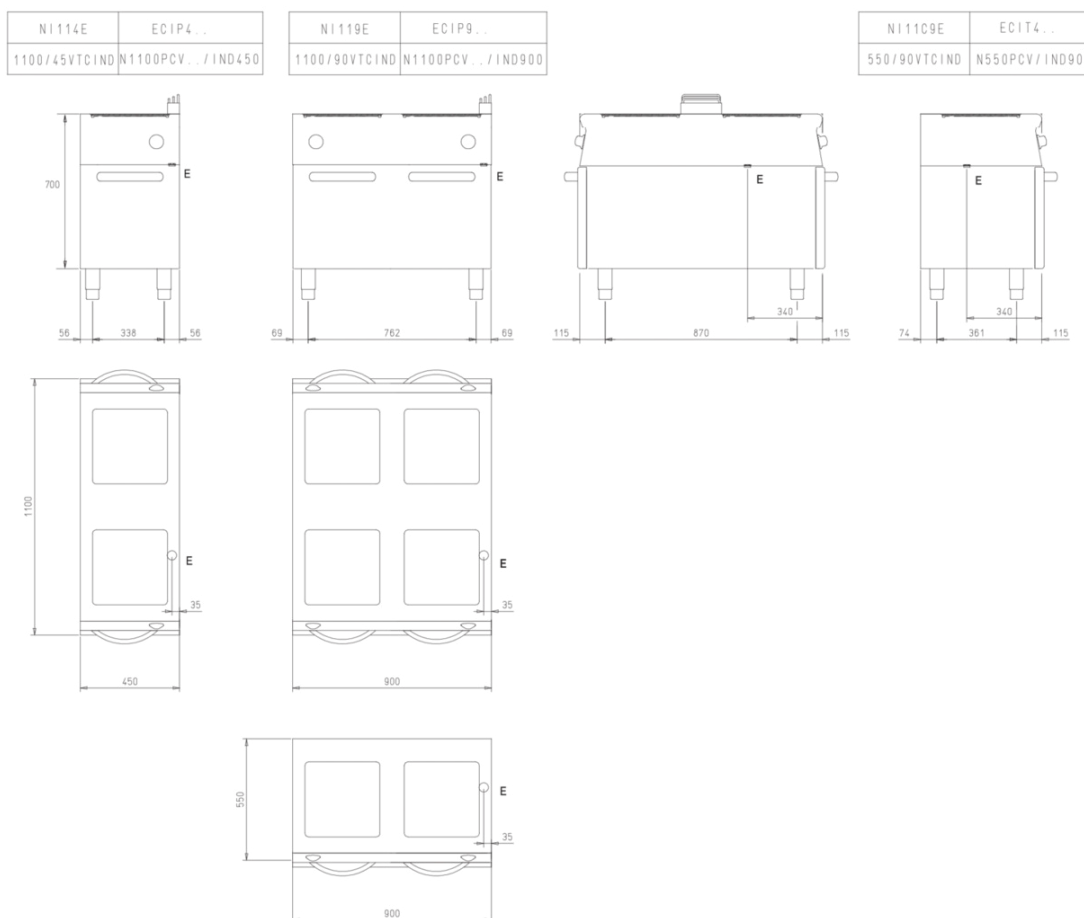

#### Legenda - Legende - Key - Legende - Leyenda - Legenda

- E** Pressacavo entrata linea elettrica - Stopfbuchse  
Electric cable stress relief - Presse etoupr de cable el  
Pisacable - Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection  
Arrivée gaz - Union da gas - Gasaansluiting  
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)

## 2 ZONE INDUCTION STOVE ON OPEN COMPARTMENT

**CODICE**  
BN12101420

**MODELLO**  
1100/45GCII

**SERIE**  
SERIE 1100

### ACCESSORIES

CODE	MODELLO	DESCRIZIONE
BN2593510	45/110PDX-SX	Door
CR1355719	CR1355719	Wheel kit
BN2590145	RUB110	Faucet 45x55x62 65 H
BN2593590	CMF1109	FRONT HANDRAIL
BN2592970	CASS45	Drawers for neutral base mod. 45 GN 1/1 h 10 cm 4 drawers
BN2592975	CASS90	Drawers for neutral base unit mod. 90 GN 1/1 h 10 cm 8 drawers
CR1011759	NZA90	FRONT SKIRTING - MODULE 900
CR1011809	NZL110	SIDE PLINTH THROUGH