

All-round INDUCTION - 28kw - Top version

CODICE
CR1358569T4W

MODELLO
DT94/10TCIITC-T4W

SERIE
DIAMANTE 4.0



GENERAL CHARACTERISTICS

Diamond 90 Touch 4.0 - Everything under control Everything is under control, perfect results every time. Thanks to the practical display, parameter selection is quick and precise. Easy and clear temperature management, and special functions are always visible and accessible from the display. Tradition and innovation, everything on your worktop A new non-slip square and rounded knob design for a more ergonomic grip and an embossed indicator that makes it easier to select the datum to be set. And with the exclusive Encoder Functionality, simply touch the parameter you want, turn the knob to adjust the level and press it to start the set datum. With water- and dirt-proof crown. Quick and precise parameter selection. Easy and clear temperature management. Special functions always visible and accessible from the display. Stainless steel outer shells and feet. Height from worktop adjustable from 840 to 900 mm. Tops with 2 mm thickness All model-identified equipment (T4W) is 4.0 Ready equipment, allowing you to benefit from all the advantages of connecting your equipment to a cloud system.

TECHNICAL SPECIFICATIONS

■ Unbreakable glass-ceramic top. ■ Serigraphs identifying cooking zones. ■ Safety sensor to prevent overheating. ■ Power adjustable to 12 levels Heating by means of an inductor equipped with a device that detects the presence of the cooking vessel on the cooking zone and automatically activates/deactivates heating. ■ Heating by means of an inductor equipped with a device that detects the presence of the cooking vessel on the cooking zone and automatically switches the heating on/off, and a device against overheating.

■ Power adjustable to 12 levels ■ Professional components tested to withstand intensive use over time ■ Safety sensor to prevent overheating. ■ Cooking zones with 5KW power ■ Mechanically controlled induction ready for IOT connection to Cloud ■ Serigraphs identifying cooking zones.

All-round INDUCTION - 28kw - Top version

CODICE
CR1358569T4W

MODELLO
DT94/10TCIITC-T4W

SERIE
DIAMANTE 4.0

Technical Information

| SPECIFICATION | DATA |
|-----------------------|--------------|
| MATERIAL | CR1358569T4W |
| SUPPLY | ELECTRICS |
| DIM. WIDTH | 800 mm |
| DIM. PRODUCTIVITY | 900 mm |
| DIM. HEIGHT | 250 mm |
| PACKAGE LENGTH | 860 mm |
| STANDARD POWER SUPPLY | 380-415V 1N |
| FREQUENCY | 50/60 Hz |
| ELECTRICAL POWER | 20 kW |
| IP GRADE | IPX5 |

All-round INDUCTION - 28kw - Top version


CODICE
CR1358569T4W

MODELLO
DT94/10TCIITC-T4W

SERIE
DIAMANTE 4.0

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

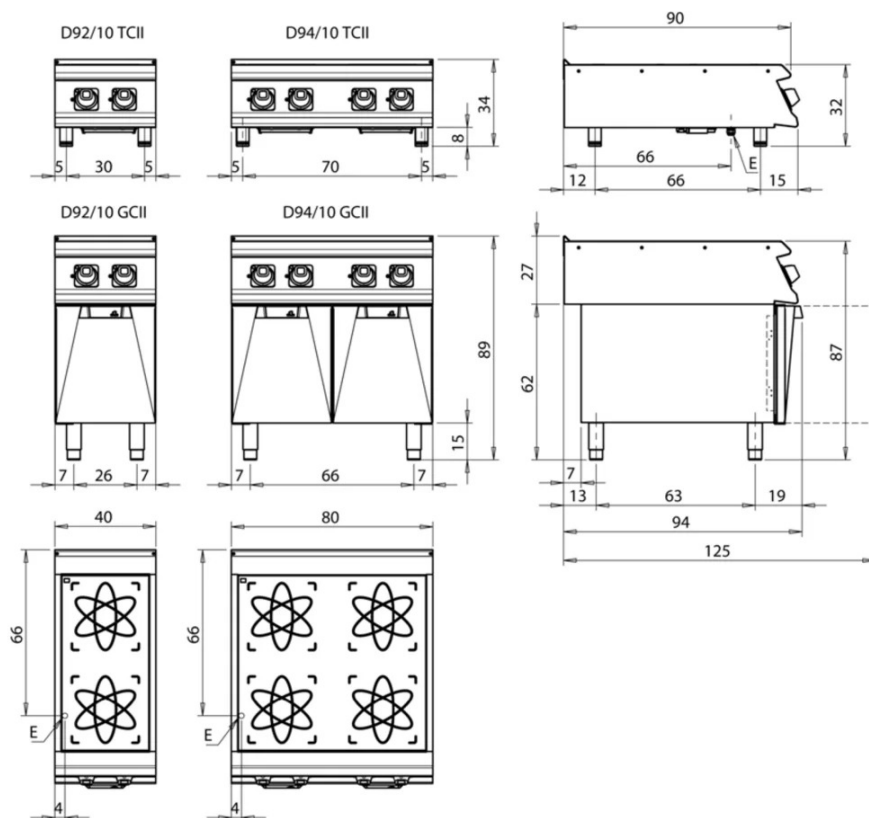

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda

| | |
|--|---|
| E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico | G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás |
| S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água | H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água |
| S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba | A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio |
| S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukkelep - Válvula de depressão | |
| S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto | |
| S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno | L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível |

All-round INDUCTION - 28kw - Top version

CODICE
CR1358569T4W

MODELLO
DT94/10TCIITC-T4W

SERIE
DIAMANTE 4.0



Power adjustable to 12 levels



Mechanically controlled induction
ready for IOT connection to Cloud



Professional components tested to
withstand intensive use over time



Safety sensor to prevent overheating.



Cooking zones with 5KW power

All-round INDUCTION - 28kw - Top version

CODICE
CR1358569T4W

MODELLO
DT94/10TCIITC-T4W

SERIE
DIAMANTE 4.0

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|-----------|-------------|--|
| CR1357499 | 4.0IOTPRO | PRO Subscription - Cloud |
| CR1357479 | 4.0IOTENTRY | ENTRY Subscription - Cloud |
| CR1355469 | D94/10B | Open base 80cm series 90 |
| CR0996979 | DBVP4 | Diamond door 39.5x3.6x46.5 cm for 40 cm compartments |
| CR0997009 | DBVPA4 | Accessory Diamond door 39.5x3.6x46.5 cm for 40 cm compartments |
| CR0997029 | DAPC | Accessories for accessory diamond knife holder |
| CR0997019 | DAPD | Accessories for Diamond door accessories |
| CR0997039 | DAPS | Accessories for diamond spice rack |
| CR0997049 | DAPM | Accessories for accessory Diamond door |
| CR0997059 | DAPDB | Accessories for accessory Diamond door/bottle holders |
| CR1353589 | DBVC4 | Drawer kit 39.5x56x46.5 cm for compartments of 40 |