


HIGH TECH WASH PLUS - OPHTW1S5PLUS

CODICE
BND211084

MODELLO
OPHTW1S5PLUS

SERIE
WASHING

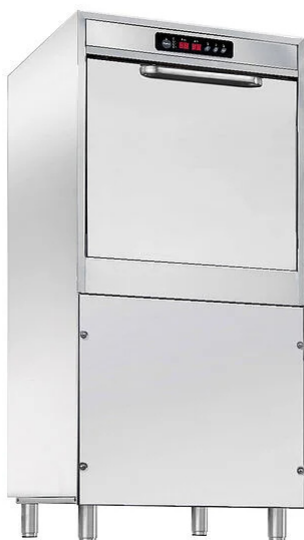

GENERAL CHARACTERISTICS

Professional dishwashers designed to meet the needs for efficient and rapid cleaning of dishes and utensils in commercial settings, such as restaurants, hotels, and similar food facilities. Olis equipment is designed to handle a high volume of tableware and ensure high hygiene standards in commercial settings.

TECHNICAL SPECIFICATIONS

■ The new technology of potwashers allows you to easily and intuitively follow all the stages of your potwashing process directly from the control panel. The innovative rinsing circuit, the energy saving function (a device that optimises energy functions avoiding

unnecessary waste) the high level of performance and the high quality materials make these machines extremely competitive and versatile.

■ High capacity on a small footprint ■ Double wall ■ Moulded tub ■ Triple filter pump ■ Automatic machine cleaning cycle

HIGH TECH WASH PLUS - OPHTW1S5PLUS

CODICE
BND211084

MODELLO
OPHTW1S5PLUS


SERIE
WASHING




Technical Information

SPECIFICATION	DATA
MATERIAL	BND211084
DEFINITION	OPHTW1S5PLUS LAVAOGGETTI EL. 50X61
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	700 mm
DIM. HEIGHT	1380 mm
NET WEIGHT	87 Kg
VOLUME (net)	0,580
PACKAGE LENGTH	760 mm
PACKAGE WIDTH	690 mm
PACKAGING HEIGHT	1450 mm
PACKAGE VOLUME	0,760 m3
GROSS PACKING WEIGHT	103 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50Hz
ELECTRICAL POWER	10.2 kW
CERTIFICATE NR	60/120/180/300 sec
WASH PUMP	1120W
CERTIFICATE NR	10120W
WATER CONSUMPTION	2,6 lt

CODICE
BND211084

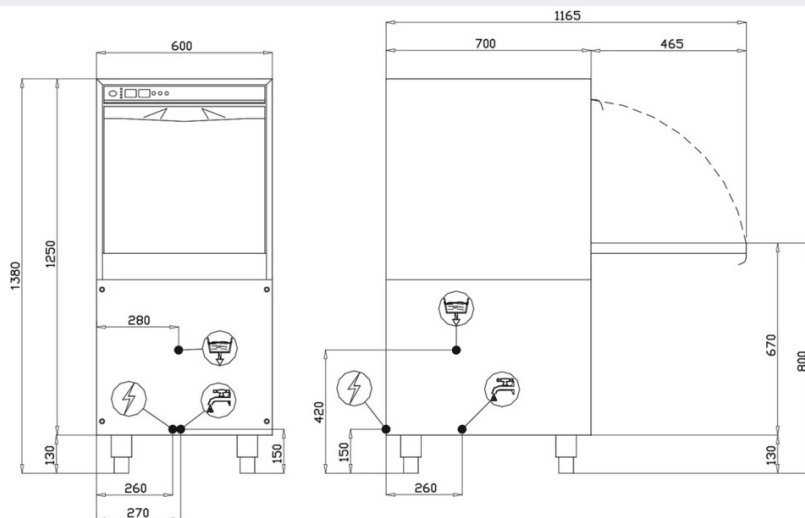 MODELLO
OPHTW1S5PLUS

 SERIE
WASHING


	ENTRATA ACQUA 3/4" GAS
	SCARICO ACQUA Ø 24mm
	ALLACCIAMENTO ELETTRICO

DATI TECNICI				
DIMENSIONI ESTERNE				
larghezza	600 mm			
profondita'	700 mm			
altezza(piedino avvitato)	1380 mm			
PESO NETTO\ (versione base)	99 kg			
TENSIONE DI ALIMENTAZIONE	400V 3N 50Hz			
POTENZA MASSIMA ASSORBITA	10120 W			
DUREZZA ACQUA	2-8 °F			
PRESSIONE ACQUA ALIMENTAZIONE	200-400 kPa			
ALTEZZA UTILE & CESTI				
diametro piatti	---			
altezza utile	440 mm			
DIMENSIONE CESTI	500X610 mm			
DOTAZIONE CESTI	1XC132 - 1X575005 - 1XC86/A			
N° CICLI (sec)	1 (60)	2 (120)	3 (180)	4 (300)
ALIMENTAZIONE ACQUA 55°C				
produzione cesti(*) ⁽¹⁾ Cesti/h	60	30	20	12
ALIMENTAZIONE ACQUA 10°C				
produzione cesti(*) ⁽¹⁾ Cesti/h	30	30	20	12
CONSUMO ACQUA PER CICLO	2.6 l			
CAPACITA' BOILER	15 l			
RESISTENZA BOILER	9000 W			
SET. TEMPERATURA RISCACQUO	85°C			
CAPACITA' VASCA	25 l			
RESISTENZA VASCA	2700 W			
SET. TEMPERATURA VASCA	55°C			
POTENZA POMPA LAVAGGIO	1120 W (630 l/min***)			
POTENZA POMPA RISCACQUO	250 W (150 l/min***)			
pompa scarico (optional)	190 W (120 l/min***)			
RUMOROSITA'	63.8 dB(A)			

(*) CON TERMOSTOP DI SERIE

(***) PORTATA MASSIMA

⁽¹⁾ In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO


PAGINA 1 / 1

HIGH TECH WASH PLUS - OPHTW1S5PLUS

CODICE
BND211084

MODELLO
OPHTW1S5PLUS

SERIE
WASHING



Stabilized pressure rinsing and constant boiler water temperature of 85°C. Thanks to the atmospheric boiler, mixing of mains water in the rinse phase is avoided. The PLUS system also ensures greater control and correct dosing of rinse aid in each cycle.



Fully molded basin. Independent stainless steel wash/rinse arms



Double-walled door