

# STORAGE TABLE OR GN 1/1 ( 2 DOORS TEMP -15/-20°C ) TOP WITH SPLASHBACK

CODICE  
BN26KK5002104LB

MODELLO  
OOKBT02PA

SERIE  
REFRIGERATED TABLES



## GENERAL CHARACTERISTICS

The main advantage of good refrigeration is to store food safely and hygienically, reducing the risk of contamination and spoilage. With their stainless steel capacity and structure, the refrigeration equipment ensures optimal preservation of vegetables, meat, fish, ice cream and creams, while maintaining their flavour and fragrance. Compliance with hygiene and food safety standards, reduced energy costs and increased efficiency in kitchen work are aspects that guided OLIS in the development of a new range of refrigeration equipment.

The refrigerated tables, all certified for efficiency and quality, guarantee the perfect observation of raw materials, processed products, gastronomy and pastries, thanks also to an automatic door closing system with magnetic gasket.

## TECHNICAL SPECIFICATIONS

■ Cell bottom printed with rounded corners and removable grid supports for the maximum degree of hygiene and load flexibility. Insulation thickness of 60 mm, made of high-density expanded polyurethane, completely free of CFC. Fully extractable drawers, thanks to special Fullterer telescopic guides in stainless steel. Self-closing door with 100° opening lock. Lower hinge fixed frontally for installation on the plinth. ■ REFRIGERATION UNIT ■ Evaporators positioned behind

each door pillar to ensure uniform cold distribution ■ Evaporators with cathodic treatment ■ CONTROLS, MONITORING, AND SAFETY FEATURES: ■ Electronic control board with HACCP function ■ Hot gas defrost system (onboard motor versions) ■ Electric defrost (on predisposed versions)

# STORAGE TABLE OR GN 1/1 ( 2 DOORS TEMP -15/-20°C ) TOP WITH SPLASHBACK

CODICE  
BN26KK5002104LB

MODELLO  
OOKBT02PA

SERIE  
REFRIGERATED TABLES

## Technical Information



SPECIFICATION	DATA
MATERIAL	BN26KK5002104LB
DEFINITION	OOKBT02PA DX BT PSPD C/A 50SV OLI
SUPPLY	ELECTRICS
DIM. WIDTH	1275 mm
DIM. PRODUCTIVITY	700 mm
DIM. HEIGHT	950 mm
NET WEIGHT	88 Kg
VOLUME (net)	0.847875
PACKAGE LENGTH	1320 mm
PACKAGE WIDTH	750 mm
PACKAGING HEIGHT	1060 mm
PACKAGE VOLUME	1,049 m3
GROSS PACKING WEIGHT	102 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50Hz
ELECTRICAL POWER	0.49 kW
GAS/REFRIGERANT TYPE	R452a
IP GRADE	IPX4
RATED CURRENT	3.45
Capacity	246

# STORAGE TABLE OR GN 1/1 ( 2 DOORS TEMP -15/-20°C ) TOP WITH SPLASHBACK

CODICE  
BN26KK5002104LB

MODELLO  
OOKBT02PA

SERIE  
REFRIGERATED TABLES

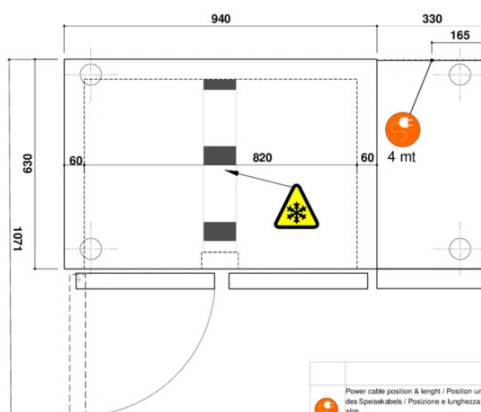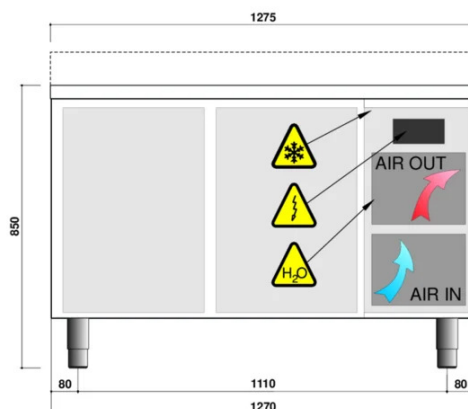

	Power cable position & length / Position und Länge des Stromkabels / Posizione e lunghezza cavo alimentazione
	Refrigerant tubes / Kälteleitungen / Tubi refrigeranti
	Drainage pipe / Abfluhröhre / Tubo scarico
	Electrical components position / Position der elektrischen Komponente / Posizione componenti elettrici

**OK 2 DOORS  
GASTRONORM H 660**  
REFRIGERATED COUNTERS  
KÜHLTISCHE / TAVOLI REFRIGERATI  
TABLES REFRIGEREES  
MESAS REFRIGERADA  
GEKOELDE WERKBANKEN  
ОХЛАЖДЕННЫЕ ПРИЛАВКИ

## STORAGE TABLE OR GN 1/1 ( 2 DOORS TEMP -15/-20°C ) TOP WITH SPLASHBACK

CODICE  
BN26KK5002104LB

MODELLO  
OOKBT02PA

SERIE  
REFRIGERATED TABLES



Ease of programming and immediate accessibility. The solution for quick and easy use.



Capacitor protected by filters to ensure optimal operation over time.



Molded cell bottom with rounded edges and removable grid supports for maximum hygiene and loading flexibility.



Full extension drawers with special Filterer stainless steel telescopic slides



Evaporators placed behind each door pillar to ensure uniformity in cold distribution.