

2-BASKET GAS COOKER 40 Litres

CODICE
CR0991009

MODELLO
D94/10CPG

SERIE
DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Moulded tubs with rounded corners, made of AISI 316 stainless steel for maximum corrosion resistance. ■ Water filling available by means of solenoid valve with the possibility of fast or slow loading or by means of a mechanical tap located on the control panel Stainless steel water outlet integrated in the expansion zone, and floor drain. ■ Safety pressure switch to prevent activation of heating without water in the tank. ■ Gas version: Heating via stainless steel burner positioned outside the tank. ■ Safety gas valve with thermocouple and electric ignition. ■ Electric version: Heating by means of an AISI 304 steel

armoured heating element located in the tank and rotatable by 90° for easy cleaning.

■ Safety pressure switch to prevent activation of heating without water in the tank. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

2-BASKET GAS COOKER 40 Litres

CODICE
CR0991009

MODELLO
D94/10CPG

SERIE
DIAMANTE 90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0991009
DEFINITION	D94/10 CPG CUOCIPASTA GAS M80 2V.40+40LT
COMMERCIAL LINE	DIAMANTE
SUPPLY	MIXED
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	102 Kg
VOLUME (net)	0,626
PACKAGE LENGTH	840 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1170 mm
PACKAGE VOLUME	1,003 m3
GROSS PACKING WEIGHT	111.6 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50 Hz
ELECTRICAL POWER	0,030 kW
GAS POWER	28,00
GAS POWER (G25.3/25mbar)	27,00
GAS/REFRIGERANT TYPE	GPL 28-30/37 mbar
TENSION	230
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 CPG
Capacity	20 litri

2-BASKET GAS COOKER 40 Litres



weinnovate cooking


CODICE
CR0991009

MODELLO
D94/10CPG

SERIE
DIAMANTE 90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

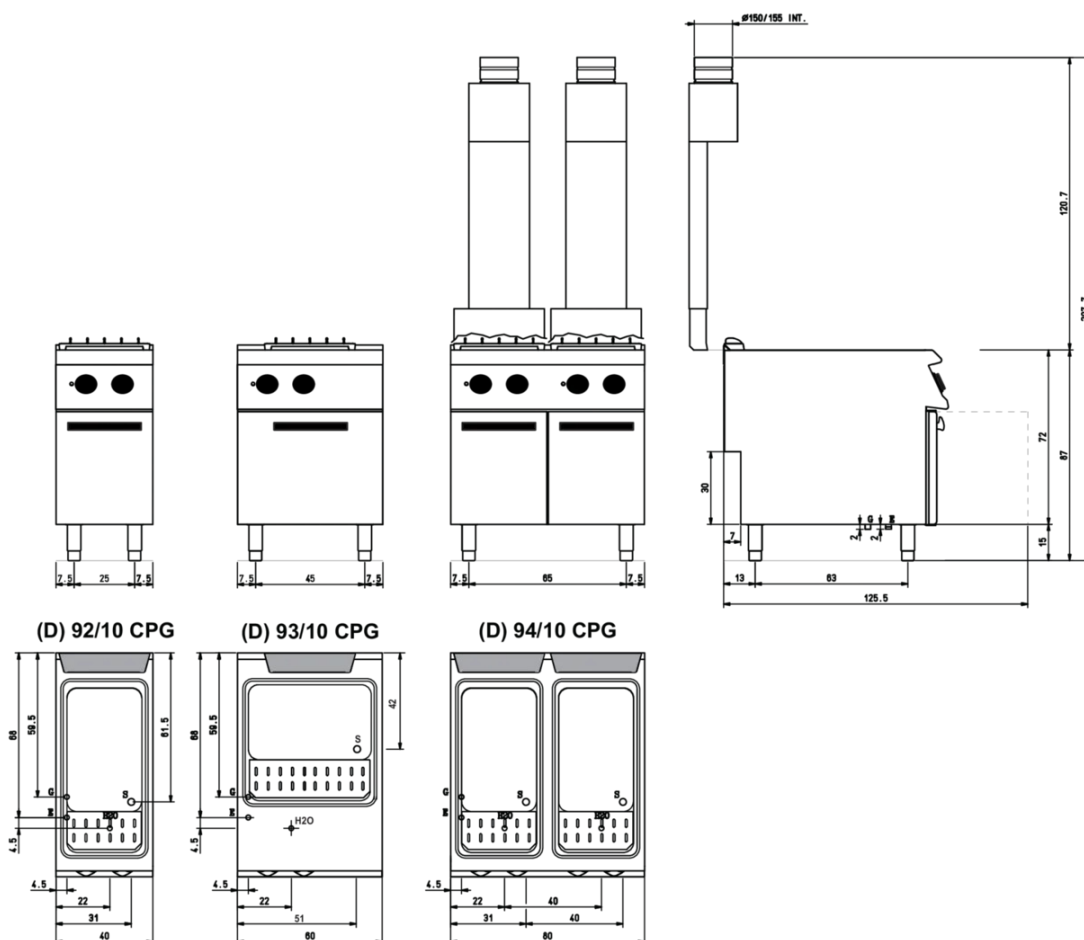

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet
Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 3/4
- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection
Arrivée gaz - Union de gas - Gasaansluiting
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- S** Attacco scarico acqua - Wasserablauf - Water outlet
Vidange de l'eau - Desaguadero - Wateraftapaansluiting
EN 10226-1 R 1

2-BASKET GAS COOKER 40 Litres

CODICE
CR0991009

MODELLO
D94/10CPG

SERIE
DIAMANTE 90



Safety pressure switch to prevent activation of heating without water in the tank.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

2-BASKET GAS COOKER 40 Litres

CODICE
CR0991009

MODELLO
D94/10CPG

SERIE
DIAMANTE 90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0999149	GFCP40	40Lt BOTTOM TANK GRID
CR0999179	9KIT-A	40 LITRE TUB BASKET KIT
CR0999189	9KIT-B	40 LITRE TUB BASKET KIT
CR0999199	9KIT-C	40 LITRE TUB BASKET KIT
CR0789930	9KIT-D	40 LITRE TUB BASKET KIT
CR0999219	9KIT - E	KIT 2 GN1/2 STAINLESS STEEL BASKETS WITH SIDE HANDLES
CR0592799	ZF8	Front plinth - FOR INSTALLING EQUIPMENT WITH FLOOR HEIGHT 90 CM L=80
CR0592830	ZG	SKIRTING JOINT
CR0592820	9ZL	Side plinth
MA97432000	R	WHEEL KIT (2 + 2) Ø 100
MA97433000	RI	WHEEL KIT (2 + 2) Ø 101 STAINLESS STEEL
CR0592869	PZM	NO. 4 STAINLESS STEEL FEET FOR INSTALLATION ON CONCRETE PLINTH
CR0593580	9PT	No. 4 stainless steel feet for installation on tops
CR0592879	KPA	N.2 STAINLESS STEEL FEET WITH FLANGE
CR0592940	9CAT*	Water column for top equipment
CR0999109	CCP16D	BASKET GN1/6 RIGHT-HAND HANDLE
CR0999079	CCP12	BASKET GN1/2 SIDE HANDLE
CR0999089	CCP13L	BASKET GN1/3 SIDE HANDLE
CR0999099	CCP13F	BASKET GN1/3 FRONT HANDLE
CR0999119	CCP16S	BASKET GN1/6 LEFT HANDLE
CR0999129	CCP19	BASKET GN1/9 FRONT HANDLE
CR0999169	CVCP40	40 LITRE TANK LID