

4-BURNER GAS COOKER ON ELECTRIC OVEN

CODICE
BN12100061

MODELLO
1100/90CGEP

SERIE
SERIE 1100



GENERAL CHARACTERISTICS

A complete range that stands out for its exceptional versatility and the perfect combination of modules, thanks to the use of laser cutting technology.

The 1100 Series makes it possible to create different combinations and to equip the base units with a variety of solutions: central cooking blocks on bases, on bridges and even suspended; free-standing and therefore more functional pasta cookers and fryers. All in a structure that is both sturdy and design at the same time.

AISI 304 stainless steel, Scotch Brite finish, laser-cut 2 mm thick worktops

Wide choice of burners with different power ranges (3.5Kw, 5.6 Kw, 7 Kw, 10Kw)

Burners with stabilised flame, nickel-plated cast iron

Virtually unlimited possibility of power combinations (in compliance with maximum approvals)

Tested components and high efficiency of the heating elements used

Counter tops can be equipped with pass-through ovens, hot cabinets, ventilated, neutral, cantilever and bridge ovens

Also available with plinth

TECHNICAL SPECIFICATIONS

■ Upper burners with stabilised flame, made of nickel-plated cast iron.
■ Thermocouple safety valves with pilot flame. ■ Acid-resistant black enameled cast iron grids with long spokes for supporting small pans.
Basins
stainless steel drip collectors.

■ High-efficiency 10 kW single burner. ■ Removable drip tray. ■ Pass-through gas oven measuring 53.9x101.8x29.23 cm.

4-BURNER GAS COOKER ON ELECTRIC OVEN

CODICE
BN12100061

MODELLO
1100/90CGEP

SERIE
SERIE 1100

Technical Information

SPECIFICATION	DATA
MATERIAL	BN12100061
DEFINITION	1100/90 CGEP CUC.GAS FE 90 110
COMMERCIAL LINE	SERIE 1100
SUPPLY	MIXED
DIM. WIDTH	900 mm
DIM. PRODUCTIVITY	1100 mm
DIM. HEIGHT	870 mm
NET WEIGHT	129 Kg
VOLUME (net)	0,861
PACKAGE LENGTH	1260 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1100 mm
PACKAGE VOLUME	1,414 m3
GROSS PACKING WEIGHT	155 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	9,000 kW
GAS POWER	40,00
GAS POWER (G25.3/25mbar)	36,00
GAS/REFRIGERANT TYPE	GPL 28-30/37 mbar
N. FIRES/PLATES	QUATTRO FUOCHI
TENSION	400
IP GRADE	IPX4
CERTIFIED MODEL	1100/90CGEP

4-BURNER GAS COOKER ON ELECTRIC OVEN



weinnovate cooking


CODICE
BN12100061

MODELLO
1100/90CGEP

SERIE
SERIE 1100

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm
MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

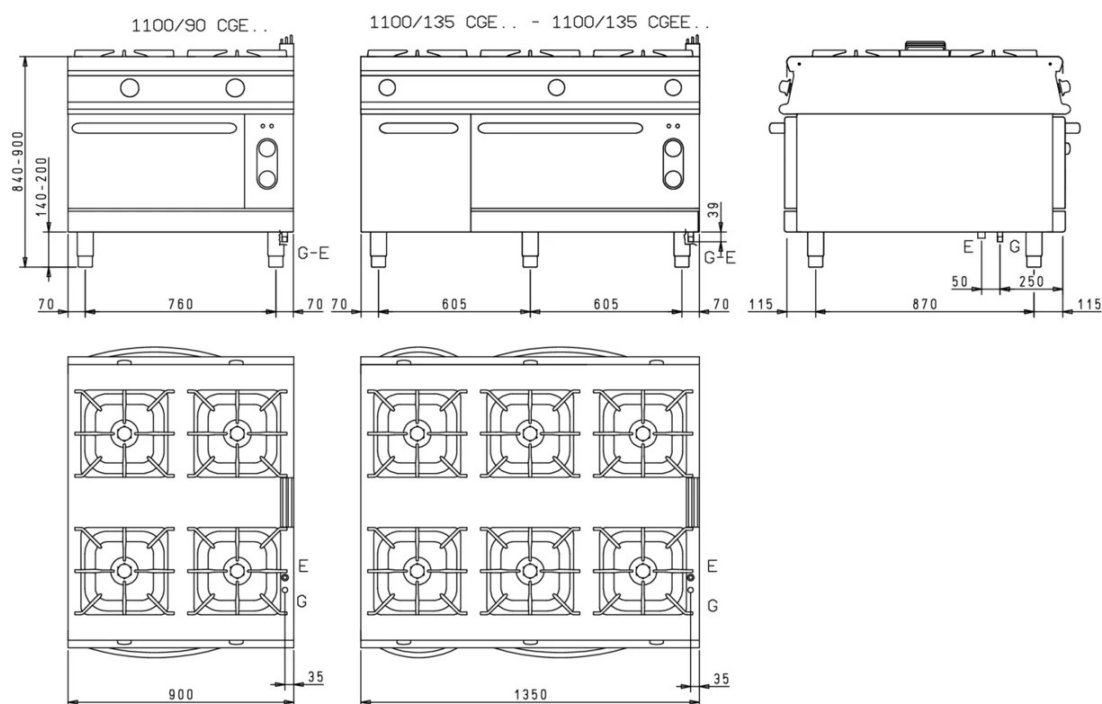

Legenda - Legende - Key - Legende - Leyenda - Legenda

- E Pressacavo entrata linea elettrica - Stopfbuchse
Electric cable stress relief - Presse etoupr de cable el
Pisacable - Elektrische kabelwartel
- G Attacco arrivo gas - Gasanschluss - Gas connection
Arrive gaz - Union da gas - Gas aansluiting
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)

4-BURNER GAS COOKER ON ELECTRIC OVEN

CODICE
BN12100061

MODELLO
1100/90CGEP

SERIE
SERIE 1100



High-efficiency 10 kW single burner.



Removable drip tray.



Pass-through gas oven measuring
53.9x101.8x29.23 cm.

4-BURNER GAS COOKER ON ELECTRIC OVEN

CODICE
BN12100061

MODELLO
1100/90CGEP

SERIE
SERIE 1100

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1355719	CR1355719	Wheel kit
BN2590145	RUB110	Faucet 45x55x62 65 H
BN2593590	CMF1109	FRONT HANDRAIL
CR1011759	NZA90	FRONT SKIRTING - MODULE 900
CR1011809	NZL110	SIDE PLINTH THROUGH