

GAS FRYER 1 BOWL 12 L

CODICE
CR1356189

MODELLO
D9212/10FRIG

SERIE
DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ AISI 18/10 stainless steel tanks with cold zone and foam expansion zone. ■ Oil drain taps. ■ Oil drip pans on request. ■ Safety thermostat (230°C) against excessive oil temperatures. ■ IPX5 water jet protection

■ Tank depth and width increased to increase capacity. ■ Moulded basin with flat top and large cold zone for easy cleaning. ■ The large cold zone allows frying residues to settle, significantly extending the

quality and life of the oil. ■ Heating via stainless steel burner outside the tank. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

GAS FRYER 1 BOWL 12 L

CODICE
CR1356189

MODELLO
D9212/10FRIG

SERIE
DIAMANTE 90

Technical Information

| SPECIFICATION | DATA |
|--------------------------|--|
| MATERIAL | CR1356189 |
| DEFINITION | D9212/10 FRIG FRIGGITRICE GAS M40 1V12LT |
| COMMERCIAL LINE | DIAMANTE |
| SUPPLY | GAS |
| DIM. WIDTH | 400 mm |
| DIM. PRODUCTIVITY | 900 mm |
| DIM. HEIGHT | 870 mm |
| NET WEIGHT | 51 Kg |
| VOLUME (net) | 0,313 |
| PACKAGE LENGTH | 460 mm |
| PACKAGE WIDTH | 1020 mm |
| PACKAGING HEIGHT | 1150 mm |
| PACKAGE VOLUME | 0,540 m3 |
| GROSS PACKING WEIGHT | 61.4 Kg |
| GAS POWER | 9,50 |
| GAS POWER (G25.3/25mbar) | 9,50 |
| CERTIFIED MODEL | D9212/10 FRIG |
| Capacity | 12 litri |


GAS FRYER 1 BOWL 12 L

CODICE
CR1356189

MODELLO
D9212/10FRIG

SERIE
DIAMANTE 90

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

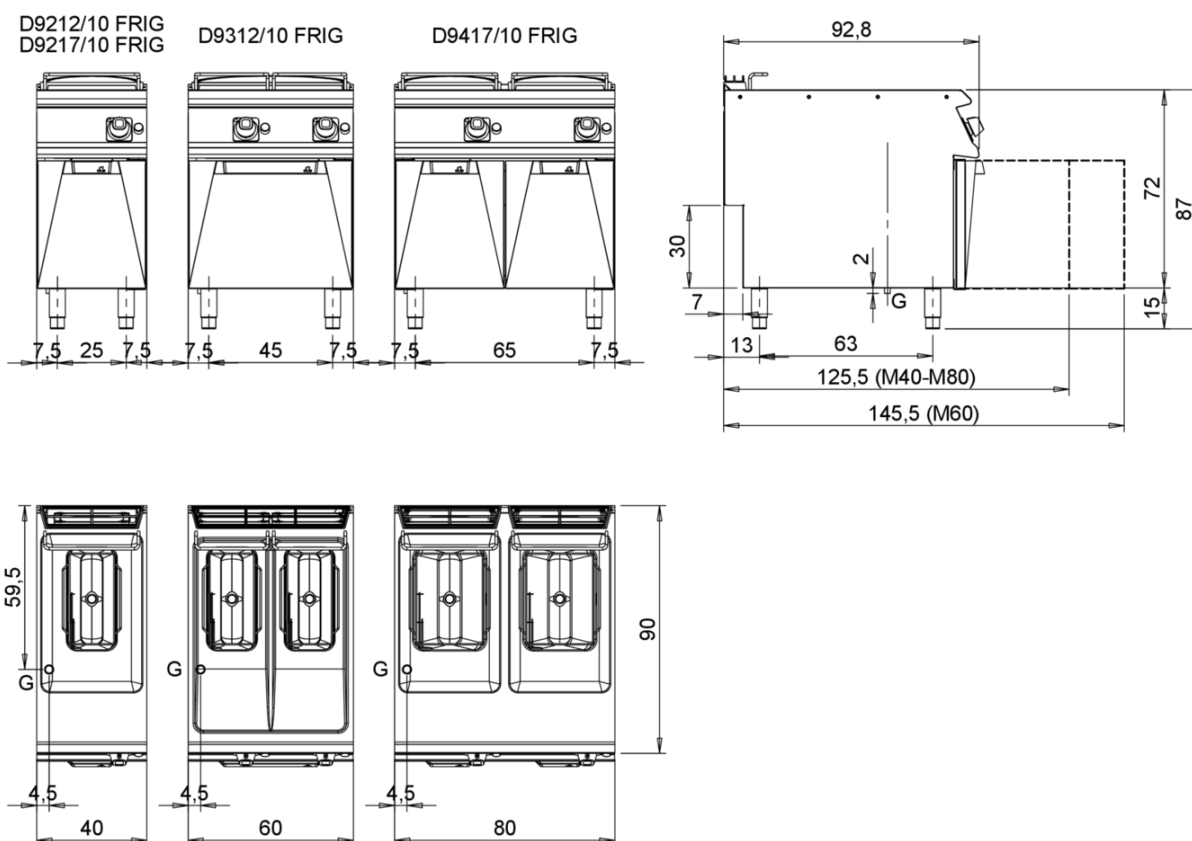

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda

| | |
|---|---|
| E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico | G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK) |
| S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água | H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água |
| S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba | A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio |
| S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão | |
| S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto | |
| S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno | L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nível |

GAS FRYER 1 BOWL 12 L

CODICE
CR1356189

MODELLO
D9212/10FRIG

SERIE
DIAMANTE 90



Tank depth and width increased to increase capacity.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Moulded basin with flat top and large cold zone for easy cleaning.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



The large cold zone allows frying residues to settle, significantly extending the quality and life of the oil.



Heating via stainless steel burner outside the tank.

GAS FRYER 1 BOWL 12 L

CODICE
CR1356189

MODELLO
D9212/10FRIG

SERIE
DIAMANTE 90

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|--------------|-----------|---|
| CR1353879 | DCF15/17 | Basket for tub 15 - 17 litres 1 pcs 24x33,7x12 cm capacity 15-17 litres |
| CR1353889 | DCF15/17P | Small basket for tub 15-17 litres 1 pcs 12x33,7x12 cm capacity 15-17 litres |
| CR1353929 | D9BRO | Oil pan 10-12 -15-17-22-23 litres |
| BN0221100047 | CA40/10 | Chimney extension for mod. 40 cm h=22 cm |
| BN0221100048 | CA60/10 | Chimney extension for mod. 60 cm h=22 cm |
| CR0592779 | ZF4 | Front plinth - FOR INSTALLING EQUIPMENT WITH FLOOR HEIGHT 90 CM L=40 |
| CR0592830 | ZG | SKIRTING JOINT |
| CR0592820 | 9ZL | Side plinth |
| MA97432000 | R | WHEEL KIT (2 + 2) Ø 100 |
| MA97433000 | RI | WHEEL KIT (2 + 2) Ø 101 STAINLESS STEEL |
| CR0592869 | PZM | NO. 4 STAINLESS STEEL FEET FOR INSTALLATION ON CONCRETE PLINTH |
| CR0593580 | 9PT | No. 4 stainless steel feet for installation on tops |
| CR0592879 | KPA | N.2 STAINLESS STEEL FEET WITH FLANGE |