

# 80lt ELECTRIC MANUAL BRATT PAN WITH STAINLESS STEEL BOTTOM

CODICE  
CR0990759

MODELLO  
D94/10KBEI

SERIE  
DIAMANTE 90



## GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

## TECHNICAL SPECIFICATIONS

■ Multifunctional tilting braising pan, equipment for professional catering, suitable for cooking sauces, braises and cooking with oil. ■ It guarantees high performance, exceptional firing uniformity. ■ Water feed directly into the tank via standard solenoid valve, controlled by a button on the front of the equipment ■ Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.

■ Stainless steel cooking vessel, 10 mm thick. ■ Robust, double-walled, self-balancing lids made of stainless steel to reduce heat loss. ■ Cooking temperature controlled by thermostat with adjustment from 100 to 280°C. Heating via armoured incoloy heating elements. ■ Large-radius tilting tank. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

# 80lt ELECTRIC MANUAL BRATT PAN WITH STAINLESS STEEL BOTTOM

CODICE  
CR0990759

MODELLO  
D94/10KBEI

SERIE  
DIAMANTE 90

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990759
DEFINITION	D94/10 KBEI BRASIERA EL.80 INOX
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	145 Kg
VOLUME (net)	0,626
PACKAGE LENGTH	840 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1170 mm
PACKAGE VOLUME	1,003 m3
GROSS PACKING WEIGHT	159.2 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	9,000 kW
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 KBEI

# 80lt ELECTRIC MANUAL BRATT PAN WITH STAINLESS STEEL BOTTOM

CODICE  
CR0990759

MODELLO  
D94/10KBEI

SERIE  
DIAMANTE 90


## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm



(D) 94/10 KBE ...

(D) 96/10 KBE ...

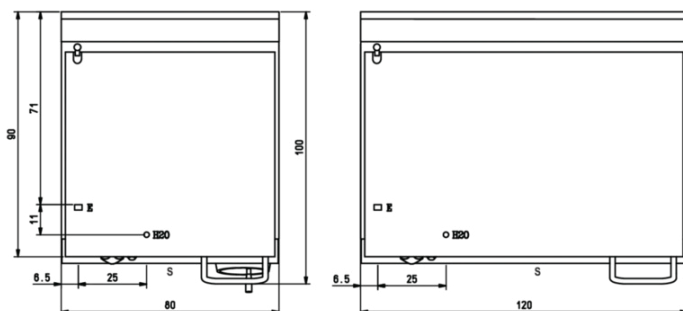

Legenda - Legende - Key - Légende - Leyenda - Legenda

**H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet  
Arrivée eau - Union de agua - Wateraansluiting

**EN ISO 228-1 G 3/4**

**E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief  
Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel

**S** Scarico vasca - Wannenabflussrohr - Pan outlet  
Vidange du bac - Descarga cuba - Water toevoer

# 80lt ELECTRIC MANUAL BRATT PAN WITH STAINLESS STEEL BOTTOM

CODICE  
CR0990759

MODELLO  
D94/10KBEI

SERIE  
DIAMANTE 90



Self-balancing lids.



Large-radius tilting tank.



Equipment certified for low voltage  
directive 2014/35/EU according to the  
international CB scheme.



Thanks to the jet-proofing certification  
(IPX5) obtained through specific tests,  
knobs and under-knobs can be washed,  
without compromising functionality  
and safety.

## 80lt ELECTRIC MANUAL BRATT PAN WITH STAINLESS STEEL BOTTOM

CODICE  
CR0990759

MODELLO  
D94/10KBEI

SERIE  
DIAMANTE 90

### ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0592799	ZF8	Front plinth - FOR INSTALLING EQUIPMENT WITH FLOOR HEIGHT 90 CM L=80
CR0592830	ZG	SKIRTING JOINT
CR0592820	9ZL	Side plinth
MA97432000	R	WHEEL KIT (2 + 2) Ø 100
MA97433000	RI	WHEEL KIT (2 + 2) Ø 101 STAINLESS STEEL
CR0592869	PZM	NO. 4 STAINLESS STEEL FEET FOR INSTALLATION ON CONCRETE PLINTH
CR0593580	9PT	No. 4 stainless steel feet for installation on tops
CR0592879	KPA	N.2 STAINLESS STEEL FEET WITH FLANGE
CR0592940	9CAT*	Water column for top equipment